



USER MANUAL

Elo Touch Solutions
Elo Backpack® with Intel
ESY00G2, ESY00G3, ESY00G5



Copyright © 2025 Elo Touch Solutions, Inc. All Rights Reserved.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Disclaimer

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

Trademark Acknowledgments

Elo, Elo (logo), Elo Touch, Elo Touch Solutions and Elo Backpack® with Intel are trademarks of Elo and its Affiliates. Windows is a trademark of Microsoft Corporation.

Table of Contents

Section 1: Introduction.....	4
Section 2: Installation	9
Section 3: Operation.....	11
Section 4: Options and Upgrades	17
Section 5: Technical Support	18
Section 6: Safety & Maintenance	19
Section 7: Regulatory Information.....	22
Section 8: Warranty Information.....	32

Section 1: Introduction

Product Description

The Elo Backpack® with Intel combines modern aesthetics, modular flexibility and commercial-grade reliability with powerful Intel processing. All models include TPM 2.0, with the i5 and i7 models offering additional support for vPro - providing maximum system security and manageability. The Elo Backpack® with Intel delivers the durability needed for continuous public use and is backed by Elo's standard 3-year warranty.



Precautions

Follow all warnings, precautions and maintenance tips as recommended in this user manual to maximize the life of your unit and prevent risks to user safety. See Chapter 6 for more information on safety.


This manual contains information that is important for the proper setup and maintenance. Before setting up and powering on your unit, please read through this manual in detail.

Connector Panel & Interfaces

1	USB-A Ports (0.9A for USB 3.2 and 0.5A for USB2.0)	9	Power Connector (DC-IN)
2	USB-A Port (0.9A)	10	USB-A Port (0.9A)
3	USB-C Port	11	USB-C Port
4	Power Indicator LED	12	DisplayPort
5	Power Button	13	HDMI Port
6	Remote Power Button Port	14	Ethernet LAN Port
7	Headset Port		
8	Wi-Fi Antenna		

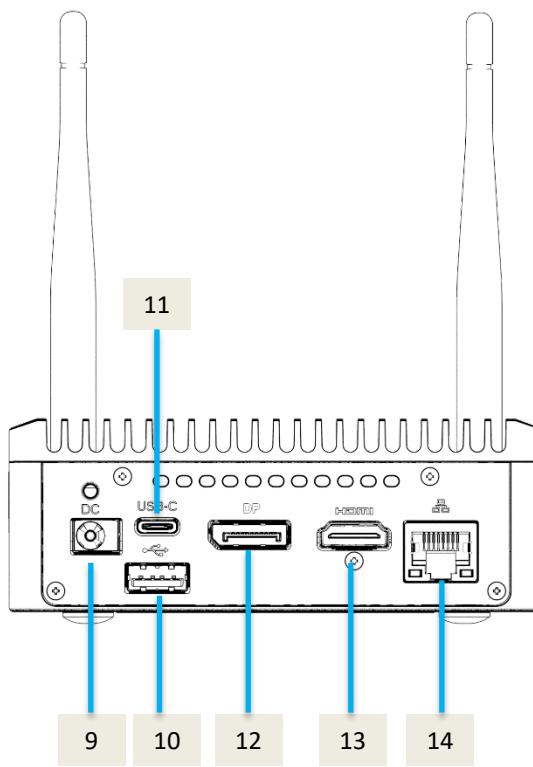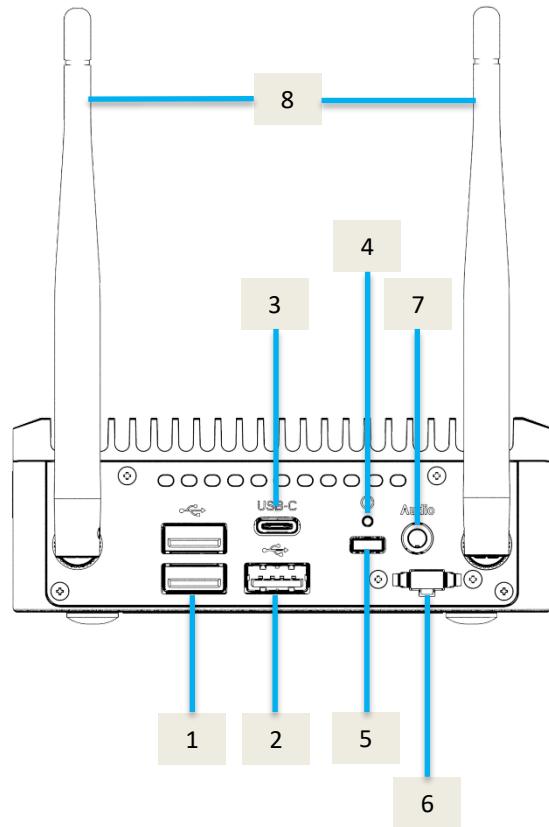

15	Kensington Nano Lock Slot	17	VESA mount holes
16	Side Mount holes		

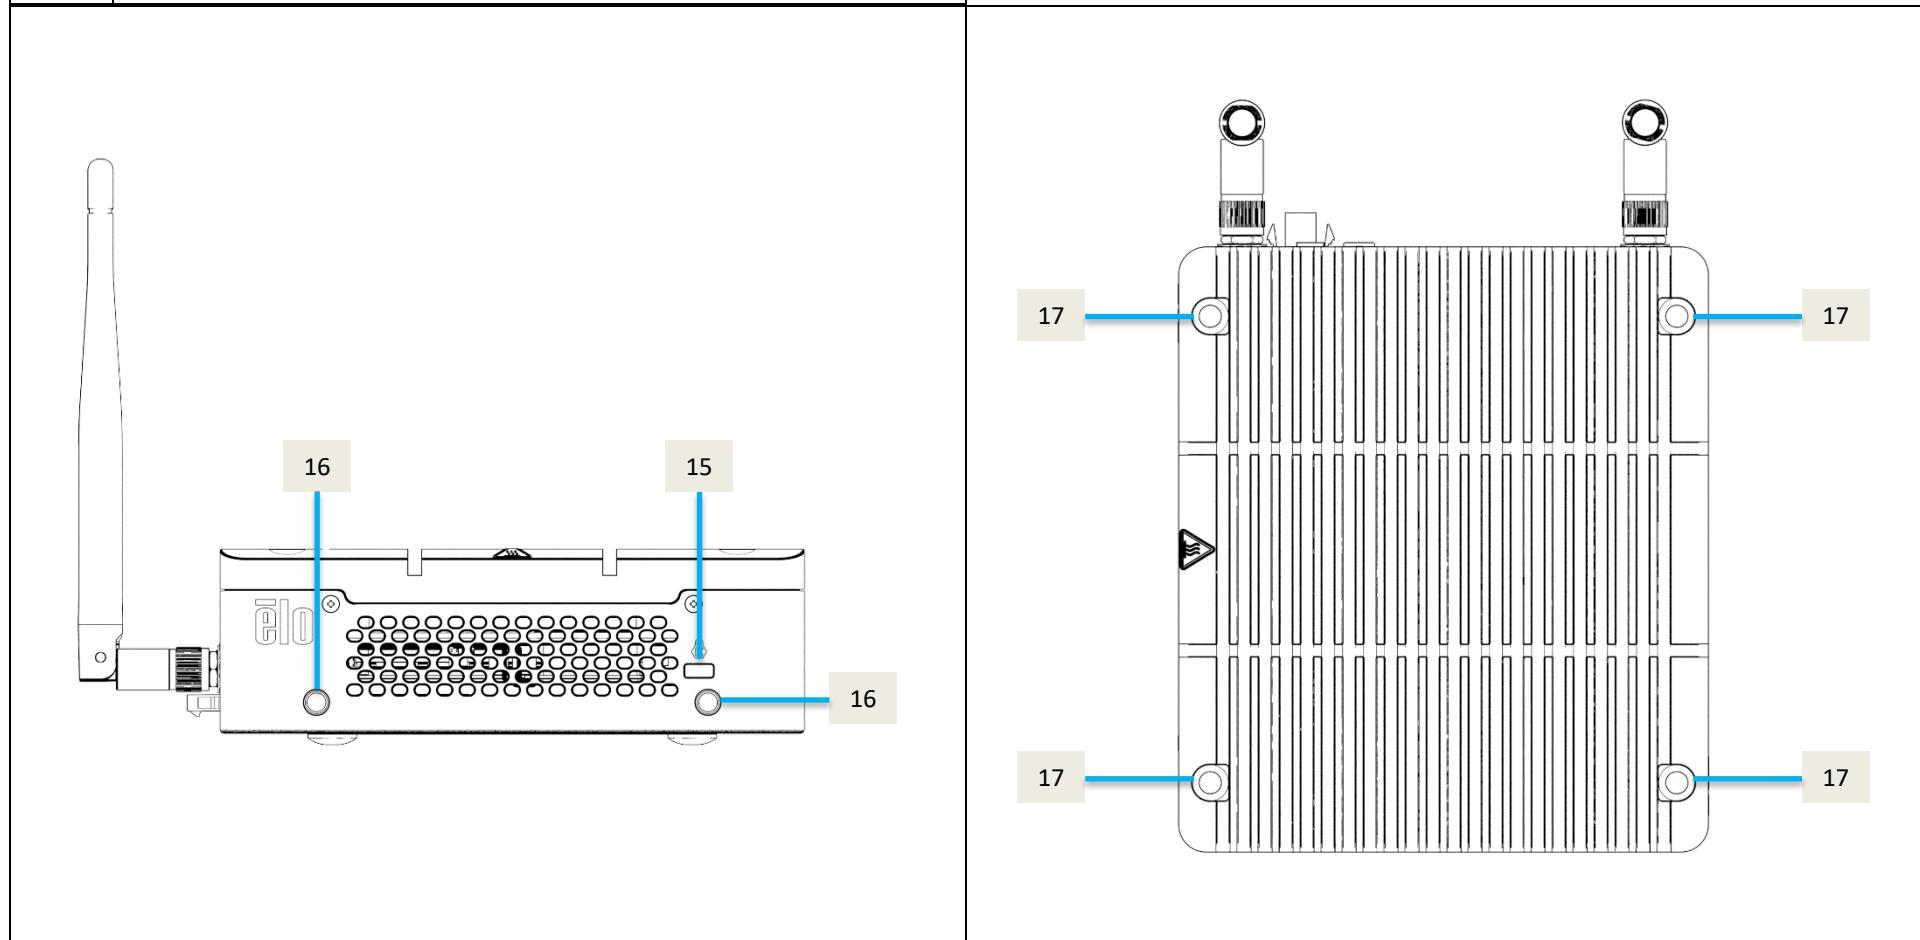

1. USB-A Ports (0.9A for USB 3.2 and 0.5A for USB2.0)

For ESY00G2 and ESY00G3, one standard Super Speed USB 3.2 Gen2 port and one standard USB 2.0 port are available on the front side.

For ESY00G5, two standard Super Speed USB 3.2 Gen2 ports are available on the front side.

2. USB-A Port (0.9A)

For ESY00G2 and ESY00G3, one standard Super Speed USB 3.2 Gen2 port is available on the front side.

For ESY00G5, one standard Super Speed USB 3.2 Gen1 port is available on the front side.

3. USB Type-C Port

The USB Type-C port allows connection to other type-C compatible devices (Up to 15W). One is on the rear side, and one is on the front side.

4. Power Indicator LED

The power indicator LED shows the state of the Elo Backpack® with Intel. See Section 3 for more details.

5. Power Button

Use finger to press the power button to turn on/off the Elo Backpack® with Intel. (Do not use a tool or hard object to push the power button).

6. Remote Power Button Port

A port to connect a Remote Power Button cable, please contact Elo technical support or product management.

7. Headset Port

The audio port is designed for headset and microphone connectivity.

8. Wi-Fi Antenna

Attach the supplied antenna to the Elo Backpack® with Intel when Wi-Fi is needed. The antenna is compatible with 2.4G, 5GHz, and 6GHz bands.

9. Power Connector (DC-IN)

To power up the Elo Backpack® with Intel, plug the DC connector of the AC/DC power adaptor kit into the power connection on the device.

10. USB-A Port (0.9A)

For ESY00G2 and ESY00G3, one standard Super Speed USB 3.2 Gen1 port is available on the rear side.

For ESY00G5, one standard Super Speed USB 3.2 Gen2 port is available on the rear side.

11. USB Type-C Port

The USB Type-C port allows connection to other type-C compatible devices (Up to 15W). One is on the rear side, and one is on the front side.

12. DP Port

The DP port allows connection to a display equipped with DP input.

13. HDMI Port

The HDMI port allows connection to a display equipped with HDMI input.

14. Ethernet LAN Port

The Ethernet LAN Port provides up to 1 Gbps speed capability for networking.

15. Kensington Nano Lock Slot

Kensington Nano Lock is an ultra-slim sized anti-theft mechanism to secure the Elo Backpack® with Intel to the desired mounting location. The Kensington cable lock is not included.

16. Side Mounting Holes

Two mounting holes for a side-mount bracket using M4 screws are provided.

17. VESA mount Holes


A four-hole 100 x 100 mm mounting pattern for M4 screws is provided, compliant with the VESA FDMI standard (VESA MIS-D, C).

Section 2: Installation

Unpacking the Elo Backpack® with Intel

Open the carton and verify that the following items are present:

- Elo Backpack® with Intel
- Power Cable US/Canada
- Power Cable Europe
- +19/19.5 Volts Power Adaptor
- M4x40 screws (4pcs, for mounting to IDS or any open-frame with 100mm VESA mount)
- Quick Install Guide
- USB Type-C Cable
- Side mount bracket (2 pcs) and M4x5 screws (4pcs)
- SMA Antenna (2 pcs)

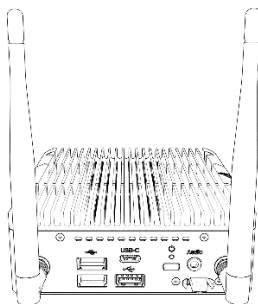

Elo Backpack® with Intel




Power Cable
US/Canada



Power Cable Europe




+19 Volts Power
Adaptor




Screws




Quick Install Guide



USB Type-C Cable

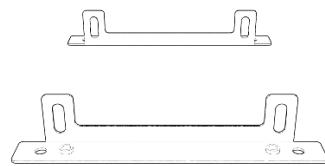

Side mounting brackets




SMA Antenna


Mounting the Elo Backpack® with Intel

The Elo Backpack® with Intel can be mounted with the supplied mounting bracket (refer to the picture below to ensure it is installed in correct orientation/ position)

- Four holes for M4 mounting screws (40mm) are provided to mount the Backpack® with Intel on any 100mm x 100mm VESA mount stand or bracket.
- Alternate M4 side mounting holes (x4, 5mm) are also available
- Included side mounting brackets can be used in conjunction with side mounting holes.

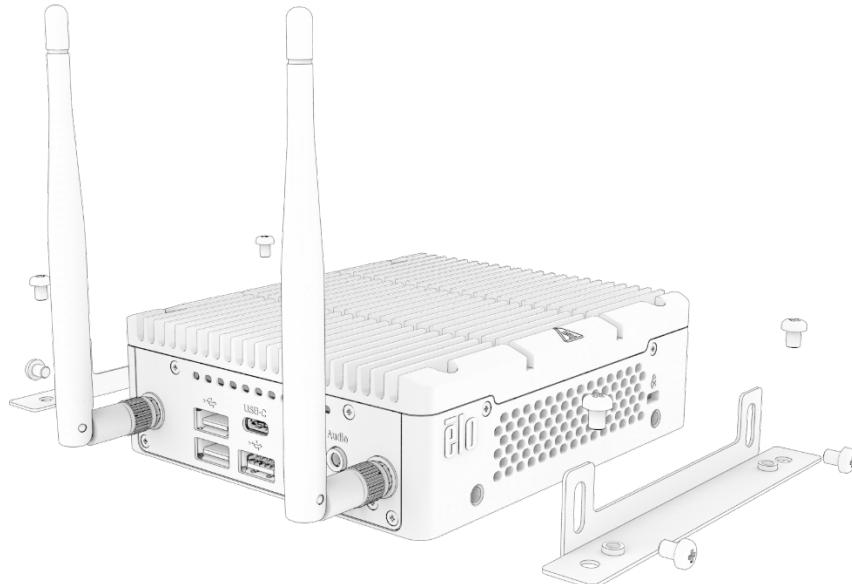

Side mounting

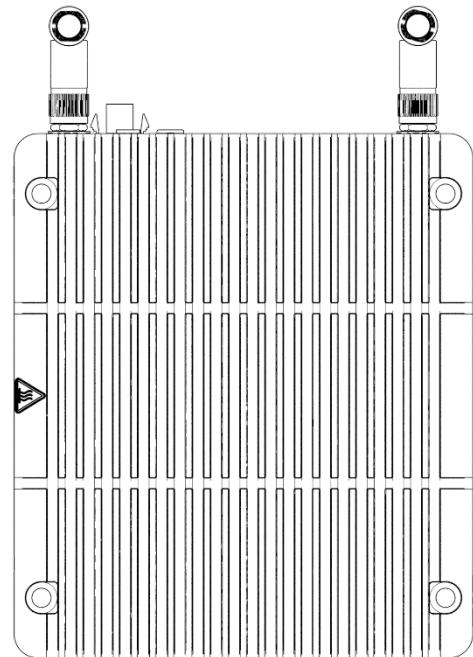


VESA mounting

Section 3: Operation

Power LED


The Elo Backpack® with Intel has a Power LED indicating the state of the power. The table below shows LED state and corresponding color.

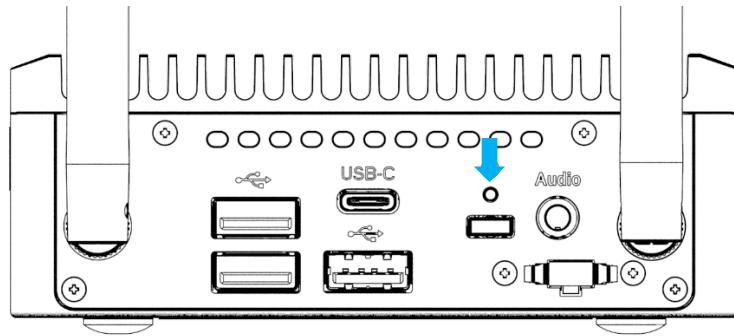

Status	LED Light
AC off	Off
Off mode	Red
Sleep mode	Orange
On	Green

When the Elo Backpack® with Intel is connected to peripherals such as a touch screen, mouse, or keyboard, touching the screen, moving the mouse, or pressing a keyboard key will bring the system out of SLEEP mode.

Ethernet LAN LED

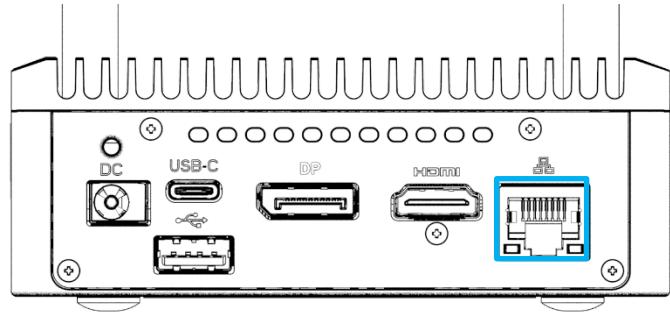

LAN Speed Status LAN LED Status

10 Mbps	No Color
100 Mbps	Orange Color
1 Gbps	Green Color

Activity Status ACT LED Status

No Link	No Color
Linked	Solid (Green Color)
Data Activity	Blinking (Green Color)

Setting Up the Operating System

To set up the operating system, you need to connect the Elo Backpack® with Intel to a display, plug in an external keyboard and/or mouse into its connector panel to execute these steps.

If the Elo Backpack® with Intel is configured with an operating system, the initial setup of the operating system takes approximately 5-10 minutes. Additional time may be needed depending on the hardware configurations and connected devices.

To set up the Microsoft® Windows® Operating System for the Elo Backpack® with Intel, turn it on by pressing the power button, and then follow the on-screen instructions.


Elo has taken time to ensure all drivers are correct and loaded with your Windows operating system. If you decide to create your own image, be sure to start with the Elo image and Elo driver packs. Or contact our support team for help.

Creating the Recovery Flash Drive

All Windows models come with the built-in Elo Restore Utility on the Windows Desktop. The utility is able to create a recovery flash drive based on the operating system you purchased. Please create your recovery flash drive immediately. In the event the HDD/SSD recovery partition is accidentally deleted or becomes inaccessible, you will need to use the recovery flash drive to recover your system.

The following procedures demonstrate how to use the utility to create a recovery flash drive.

1. Insert a blank flash drive into any of the available USB ports on your system.
2. Right-click the EloRestoreUtility icon on the Desktop and select “**Run as administrator**”.
3. Select the drive and click “**Start**” button to begin the process.



Elo OS Restore Utility USB Stick Creator

Select the drive

Drive 1 Capacity 58.64 GB

Warning, this will destroy all information on the selected drive.

Refresh

Start

Close

Version: 10.0.17763-1809-230210-M-ELO

4. Click “**Continue**” to proceed. This step will take 10-20 minutes depending on your system configurations and flash drive performance.
PLEASE NOTE THAT ALL DATA WILL BE LOST DURING THIS PROCESS.



Elo OS Restore Utility USB Stick Creator

Select the drive

Drive 1 Capacity 58.64 GB

This will wipe all the data on the disk, are you sure?


Refresh

Continue


Abort

Version: 10.0.17763-1809-230210-M-ELO

- Once the message shows "**USB Stick complete with...**", please remove the flash drive and click "**Close**" to exit the program.

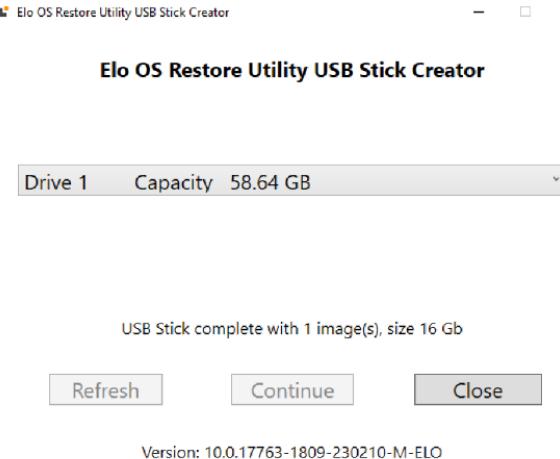

- In case the system crashes, you must use the recovery flash drive, reboot the system and press **F11** several times to enter **DeviceBoot Menu**. Then, choose "**boot from flash drive**".
- When the following UI is presented, click "**Deploy Windows OS image (with Recovery Partition)**" button.

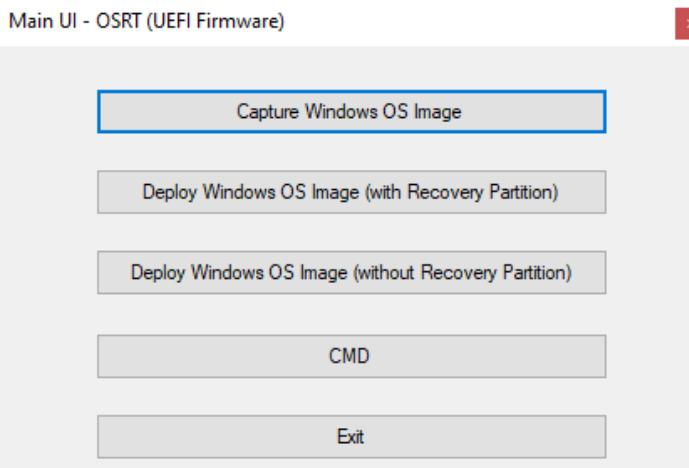

- Follow the on-screen instructions to complete the installation process and then exit the program.


Note: All data is deleted during the recovery process. The user must back up files when necessary. Elo Touch Solutions does not accept liability for lost data or software.

Note: The end user must adhere to Microsoft's Licensing Agreement.


Recovering the Operating System

If for any reason the operating system needs to be recovered to FACTORY SETTINGS, you can recover your system by following the procedures below. **PLEASE NOTE THAT ALL CUSTOMER SETTINGS AND DATA WILL BE LOST DURING THIS PROCESS.** Please be sure to completely backup all of your data, settings, and customer-installed software before proceeding.

1. Power off your Elo Backpack® with Intel completely.
2. Power on your Elo Backpack® with Intel.
3. When the following screen appears, tap to select “**UEFI – Recover Operating System**”.

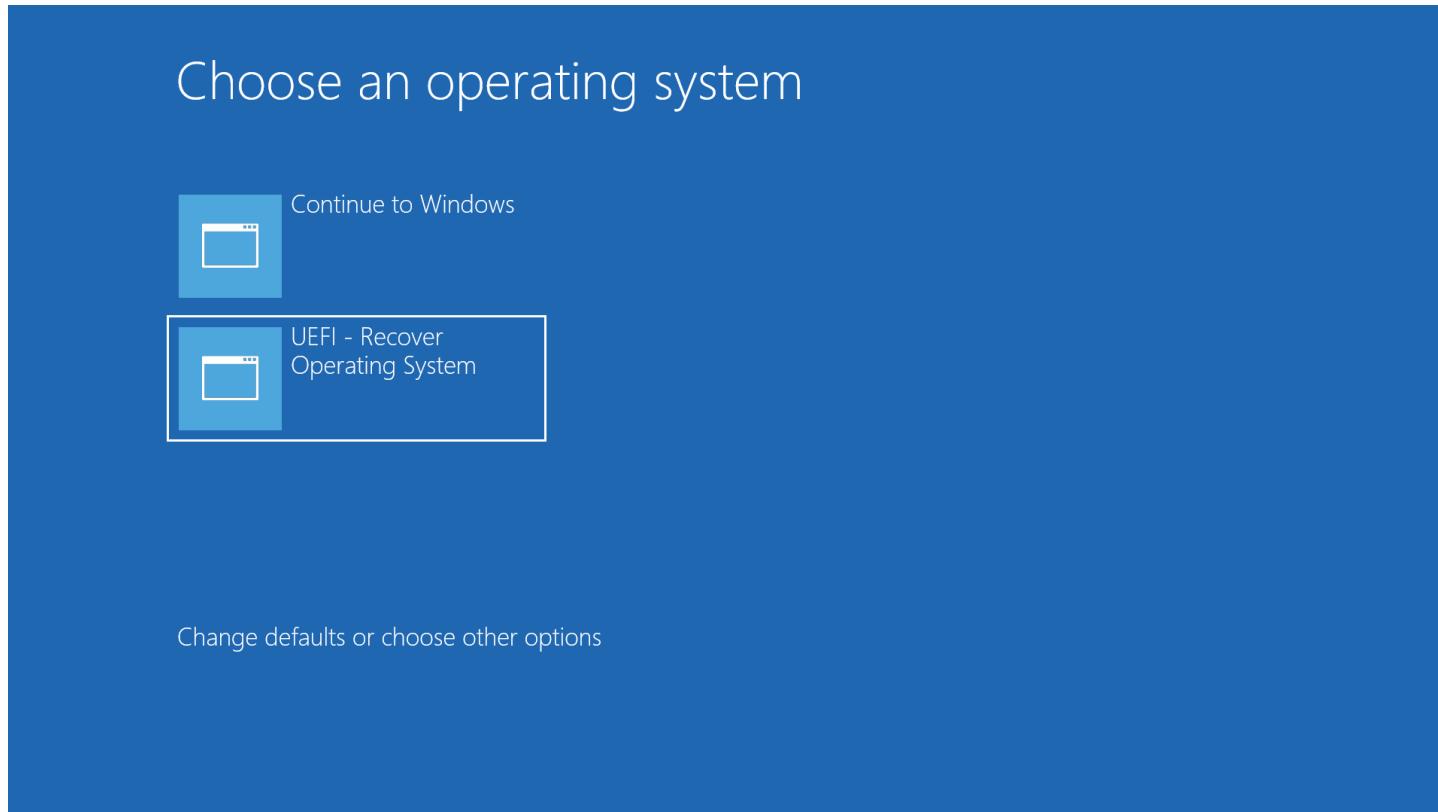

4. The following User Interface (UI) will be presented.

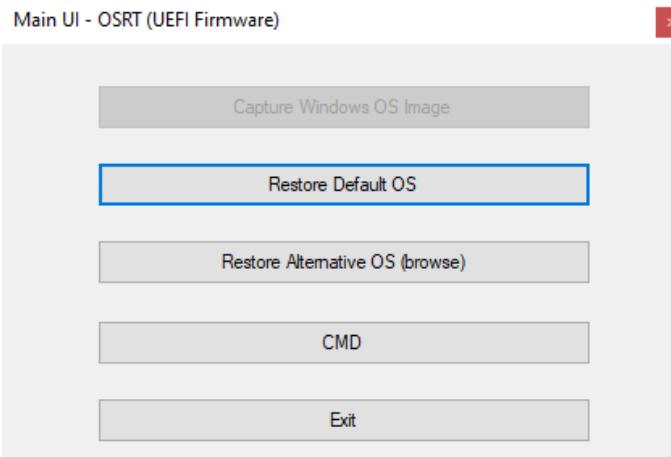

5. Select "**Restore Default OS**". The system will test your hardware automatically. Once the process is complete, click "**Start**" button to perform the system recovery function. This process will reformat the primary hard drive. **Please back up your data before performing the recovery process.**

6. Once completed, click the **Close** button. The system will return to the main menu of the Elo Recovery Solution. Then click the **Exit** button to restart your system.

NOTE: All data is deleted during the recovery process. The user must back up files when necessary. Elo Touch Solutions does not accept liability for lost data or software.

NOTE: The end user must adhere to Microsoft's Licensing Agreement.

Section 4: Options and Upgrades

Adding Optional Upgrades

Elo has qualified the following to work seamlessly with your unit. The complete installation and setup instructions are provided with the field-installable kits. Please see your Elo authorized distributor or value-added partner for pricing.

- M.2 PCIe (NVMe) 128GB SSD (E466613)
- M.2 PCIe (NVMe) 256GB SSD (E466803)

Section 5: Technical Support

If you are experiencing trouble with your Elo Backpack® with Intel, refer to the following suggestions. If the problem persists, please contact your local dealer or Elo Customer Service. Worldwide technical support phone numbers are available on the last page of this user manual.

Solutions to Common Problems

Problem	Suggested Troubleshooting
The unit won't power up.	<ol style="list-style-type: none">1. Check that the AC/DC power adaptor is properly connected.2. Verify the AC power source is functioning.3. Make sure the power button is not broken.
Monitor connected to the Elo Backpack® with Intel has a blank screen.	<ol style="list-style-type: none">1. If the Power Status LED is orange/red, the unit may be in SLEEP/HIBERNATE mode. Press the power button to see if the display comes back.2. Check the internal cable connections and look for missing or damaged electrical components.
No Bootable Device Found	<ol style="list-style-type: none">1. Confirm the product has loaded the OS.2. Storage device damage - Try to swap with another new blank drive.

Technical Assistance

Technical Specifications

Visit www.elotouch.com/products
for technical specifications for this device

Support

Visit <https://www.elotouch.com/support/technical-support>
for technical support

See this user manual's last page for worldwide technical support phone numbers.

Section 6: Safety & Maintenance

Safety

- To avoid risk of electric shock, follow all safety notices and do not disassemble the Elo Backpack® with Intel. They are not user-serviceable.
- Do not block or insert anything inside the ventilation slots.
- The Elo Backpack® with Intel is equipped with an AC/DC power adaptor. Do not use a damaged AC/DC power adaptor. Use only the AC/DC power adaptor supplied by Elo. Use of an unauthorized AC/DC power adaptor may void your warranty.
- Ensure that the Elo Backpack® with Intel is maintained and runs within the specified environmental conditions listed below.
- Be sure to disconnect the power source before disassemble cover from the bottom of the Elo Backpack® with Intel to reveal the switch. The cover from the bottom must be completely assembled while restoring the power input. Wait one-half hour after switching off before handling parts.
- Equipment is intended for installation in Restricted Access Area.

Environmental conditions for operating and storage

Temperature:

Operating	0°C to 40°C
Storage	-20°C to 60°C

Humidity (non-condensing):

Operating	10% to 90%
Storage	0% to 95%

Altitude:

Operating	0 to 5,000 m
Storage	0 to 12,192 m

Power ratings

19 Volts, 4.74 Amps max

Note: The thermal report passes with airflow 0.5m/s + CPU Minimum assured power condition. To assure proper airflow, please remove the protective film on the sides of the machine before activating the unit.

Power Adaptor Support Notice

The following information will help with management of power supply and usage on your Elo Backpack® with Intel.

- Do not exceed a total of 90 watts. Take the wattage below and add the Elo Peripherals or your other devices and check that you are under 90 watts. If you need help with the power requirements for your application, please contact Elo support to help you with the set up and calculations.
- This product is intended to be supplied by a Listed (Certificate) power supply output rated 19/19.5Vdc, 4.7/4.62A maximum, Tma 40 degree C maximum and altitude 5000m, if need further assistance, please contact manufacture or UL File owner or brand owner further information.
- The equipment power supply cord shall be connected to a socket-outlet with earthing connection.
- The Elo PNs corresponding power adaptor model name list as below table.

Configuration	ELO PN	Part Description
ESY00G2/ESY00G3/ESY00G5	E611640	AIO POWER BRICK, 19VOLT 90W, DELTA
ESY00G2/ESY00G3/ESY00G5	E516762	AIO POWER BRICK, 19VOLT 90W, ADAPTER

Care and Handling

The following tips will help keep your Elo Backpack® with Intel functioning at an optimal level:

- Disconnect the AC power cable before cleaning.
- To clean the unit, use a clean cloth lightly dampened with a mild detergent.
- It is important that your unit remains dry. Do not get liquids on or inside the unit. If liquid does get inside, turn the unit off and have a qualified service technician checks it before you power it on again.
- Ensure the environmental temperature and humidity are maintained within specification and do not block ventilation slots.
- The unit is not designed for the outdoors.

Waste Electrical & Electronic Equipment Directive (WEEE)



This product should not be disposed of with household waste. It should be deposited at a facility that enables recovery and recycling. Ensure that product is disposed at the end of its useful life according to local laws and regulations. Elo has put in place recycling arrangements in certain parts of the world. For information on how you can access these arrangements, please visit.

<https://www.elotouch.com/e-waste-recycling-program>

UL Directive

The Elo Backpack® with Intel has a lithium battery included on the motherboard. There is a risk of explosion if battery is replaced by an incorrect type. Please dispose of used batteries according the region instructions.

Warning

- It is important that your Elo Backpack® with Intel remains dry, do not pour liquid into or onto it. If it becomes wet, do not attempt to repair it yourself. Contact Elo Customer Service for instructions.
- CAUTION: Risk of fire or explosion if the battery is replaced by an incorrect type.

Section 7: Regulatory Information

Electrical Safety Information

Compliance is required with respect to the voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified herein will likely result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.

There are no operator serviceable parts inside this equipment. There are hazardous voltages generated by this equipment which constitute a safety hazard. Service shall be provided only by a qualified service technician.

Contact a qualified electrician or the manufacturer if there are questions about the installation prior to connecting the equipment to mains power.

Emissions and Immunity Information

Notice to Users in the United States for FCC compliance:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment should be installed and operated to ensure a minimum of 20 cm spacing to any person.

Notice to Users in Canada for IC compliance:

This equipment complies with the Class B limits for radio noise emissions from digital apparatus as established by the Radio Interference Regulations of Industrial Canada.

CAN ICES-003(B)/NMB-003(B)

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Notice to Users in the European Union:

Use only the provided power cords and interconnecting cabling provided with the equipment. Substitution of provided cords and cabling may compromise electrical safety or CE Mark Certification for emissions or immunity as required by the following standards:

This Information Technology Equipment (ITE) is required to have a CE Mark on the Manufacturer's label which means that the equipment has been tested to the following Directives and Standards: This equipment has been tested to the requirements for the CE Mark as required by EMC Directive 2014/30/EU as indicated in European Standard EN 55032 Class B and the Low Voltage Directive 2014/35/EU as indicated in European Standard EN 62368-1.

Classification of Certificate

Series	Configuration	Classification	Documentation
Elo Backpack® with Intel	ESY00G2/ESY00G3/ESY00G5	Class B	MD600193 DECLARATIONS OF CONFORMITY, Elo Backpack® with Intel

この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。

取扱説明書に従って正しい取り扱いをして下さい。

VCCI－B

Radio Equipment Directive

Elo hereby declares that the radio equipment type, Elo Backpack® with Intel, is in compliance with Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available at the following internet address: www.elotouch.com

This device is designed and intended for indoor use only.

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK(NI)
	CH	TR	NO				
	UK						

Operation frequency and radio-frequency power are listed as below:

- WLAN 802.11a/b/g/n/ac/ax Tri-Band 2.4G/5G/6G

2.4G Band: ≤ 27 dBm (EIRP) (The MAX Power in FCC)

5G Band: ≤ 28 dBm (EIRP) (The MAX Power in FCC)

6G Band: ≤ 24 dBm (EIRP) (The MAX Power in FCC)

- Bluetooth 5.3: 2.4GHz ≤ 20 dBm (EIRP)

Wi-Fi+BT Module: AX-210NGW

ECC/DEC/ (04)08:

The use of the frequency band 5 150-5 350 MHz is restricted to indoor operation because of the protection requirements of satellite services

EC R&TTE Directive

EU Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonization of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC Text with EEA relevance.



Identification mark

The relevant technical documentation is held at: Elo Touch Solutions, Inc.
670 N. McCarthy Boulevard Suite 100
Milpitas, CA 95035
USA.

USA

Contains FCC TX ID: PD9AX210NG

Canada

Contains IC ID: 1000M-AX210NG

Japan

RF :003-220254 TEL :D220163003

電波法により5GHz帯は屋内使用に限ります。

Argentina

CNC: C-25568

Brazil



Incorpora produto homologado pela ANATEL sob o número 14242-20-04423.

Este equipamento não tem direito à proteção contra interferência e não pode causar interferência em sistemas devidamente autorizados.

Para mais informações, consulte o site da Anatel: <https://www.gov.br/anatel/pt-br>

“Este equipamento deve ser conectado obrigatoriamente em tomada de rede de energia elétrica que possua aterramento (três pinos), conforme a Norma de instalações elétricas ABNT NBR 5410, visando a segurança dos usuários contra choques elétricos”.

Mexico

Información México La operación de este equipo está sujeta a las siguientes dos condiciones:

- 1) es posible que este equipo o dispositivo no cause interferencia perjudicial y
- 2) este equipo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

RF Exposure Information (SAR)

This device has been tested and meets applicable limits for Radio Frequency (RF) exposure. Specific Absorption Rate (SAR) refers to the rate at which the body absorbs RF energy. Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. This device was tested with a separation distance of **20cm**. Always keep this device away from your body to ensure exposure levels remain at or below the as-tested levels.

General Information to all Users:

This equipment generates, uses and can radiate radio frequency energy. If not installed and used according to this manual the equipment may cause interference with radio and television communications. There is, however, no guarantee that interference will not occur in any particular installation due to site-specific factors.

1. In order to meet emission and immunity requirements, the user must observe the following:
 - a. Use only the provided I/O cables to connect this digital device with any computer.
 - b. To ensure compliance, use only the provided manufacturer's approved line cord.
 - c. The user is cautioned that changes or modifications to the equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
2. If this equipment appears to cause interference with radio or television reception, or any other device:
 - a. Verify as an emission source by turning the equipment off and on. If you determine that this equipment is causing the interference, try to correct the interference by using one or more of the following measures:
 - i. Move the digital device away from the affected receiver.
 - ii. Reposition (turn) the digital device with respect to the affected receiver.
 - iii. Reorient the affected receiver's antenna.
 - iv. Plug the digital device into a different AC outlet so the digital device and the receiver are on different branch circuits.
 - v. Disconnect and remove any I/O cables that the digital device does not use.

(Unterminated I/O cables are a potential source of high RF emission levels.)

vi. Plug the digital device into only a grounded outlet receptacle. Do not use AC adapter plugs. (Removing or cutting the line cord ground may increase RF emission levels and may also present a lethal shock hazard to the user.)

If you need additional help, consult your dealer, manufacturer, or an experienced radio or television technician.

Energy Star Certificate

Elo Backpack® with Intel can meet Energy Star 9.0 requirements with certain configurations, please contact Elo technical support or product management.

Below SKUs can meet Energy Star 9.0 requirements and perform tests with the Windows operating system only.

Part Number	Description	UPC
E345165	ESY00G2-0UWA-0-8G-1S-NO-00-BK	843173163185
E345569	ESY00G2-0UWA-0-8G-1S-W3-64-BK	843173163192
E345966	ESY00G3-0UWA-0-6G-2S-NO-00-BK	843173163208
E346150	ESY00G3-0UWA-0-6G-2S-W3-64-BK	843173163215
E346334	ESY00G5-0UWA-0-6G-2S-NO-00-BK	843173163222
E346532	ESY00G5-0UWA-0-6G-2S-W3-64-BK	843173163239



ENERGY STAR is a program run by the U.S. Environmental Protection Agency (EPA) and U.S. Department of Energy (DOE) that promotes energy efficiency.

This product qualifies for ENERGY STAR in the "factory default" settings. Changing the factory default settings will increase power consumption that could exceed the limits necessary to qualify for ENERGY STAR rating.

For more information on the ENERGY STAR program, refer to energystar.gov.

FCC Declaration of Conformity

Per FCC 47 CFR FCC Part15 subpart B Section 2.1077(a)
In accordance with FCC Rules and Regulations

Model Number: ESY00G2, ESY00G3, ESY00G5

Equipment Category: Information Technology and Telecommunications Equipment

Equipment Class: Commercial and Light Industrial

Product Name: Touch All in one Computer

Manufacturer: Elo Touch Solutions, Inc.
670 N. McCarthy Blvd.
Suite 100
Milpitas, CA 95035
www.elotouch.com

Trademark:



Declaration:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

A handwritten signature in blue ink that reads "Kevin Huang". The signature is written in a cursive, flowing style.

Kevin Huang
Sr. Director, Systems Engineering
Elo Touch Solutions, Inc.

Agency Certifications

The following certifications and marks have been issued or declared for this system:

- United States UL, FCC
- Canada cUL, IC
- Germany, TUV
- Europe CE
- Australia RCM
- United Kingdom UKCA
- International CB
- Japan VCCI, MIC
- China CCC, SRRC
- Mexico NOM
- RoHS CoC
- Energy Star 9.0 configurations are available, please contact Elo directly.

Explanation of Markings

1. In accordance with the SJ/T11364-2006 requirement, the electronic information products are marked with the following pollution control logo. The Environment-Friendly Use Period for this product is 10 years. The product will not leak or mutate under normal operating conditions listed below, so that the use of this electronic information product will not result in any severe environmental pollution, any bodily injury, or damage to any assets.

Operating Temperature: 0-35 / Humidity: 20%-80% (non-condensing).

Storage Temperature: -20~60 / umidity:10%~95% (non-condensing).



2. It is encouraged and recommended that this product be recycled and reused according to local laws. The product should not be thrown away casually.



China RoHS

In accordance to Chinese law (Management Methods for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products), the section below lists out the name and amount of the toxic and/or hazardous materials that this product may contain.

Component Name	Toxic or Hazardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr ⁶⁺)	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
Plastic Parts	○	○	○	○	○	○
Metal Parts	X	○	○	○	○	○
Wire and Cable	X	○	○	○	○	○
PCBA	X	○	○	○	○	○

中国 RoHS (China RoHS)

根据中国 RoHS 法规《电器电子产品有害物质限制使用管理办法》，本节将列出本产品可能含有的有害物质的名称和含有信息。

产品中有害物质的名称及含有信息表

部件名称	有害物质									
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴联苯醚 (PBDE)	邻苯二甲酸二 (2-乙基) 己酯 (DEHP)	邻苯二甲酸丁基苄酯 (BBP)	邻苯二甲酸二正丁酯 (DBP)	邻苯二甲酸二异丁酯 (DIBP)
塑料部件	○	○	○	○	○	○	○	○	○	○
金属零件	○	○	○	○	○	○	○	○	○	○
电线和电缆组件	X	○	○	○	○	○	○	○	○	○
液晶显示面板	X	○	○	○	○	○	○	○	○	○
PCBA 印刷线路板	X	○	○	○	○	○	○	○	○	○
玻璃外罩	○	○	○	○	○	○	○	○	○	○

注 1：○：表示该有害物质在该部件所有均质材料中的含量均不超出电器电子产品有害物质限制使用国家标准要求。

X：表示该有害物质至少在该部件的某一均质材料中的含量超出电器电子产品有害物质限制使用国家标准要求。

注 2：以上未列出的部件，表明其有害物质含量均不超出电器电子产品有害物质限制使用国家标准要求。

标志说明

(1) 根据 SJ/T11364 的要求，电器电子产品若标有以下有害物质限制使用标识，则表明用户按照产品说明正常使用时，此产品中含有的有害物质不会发生外泄或突变，在 10 年内不会对环境造成严重污染或对人身、财产造成严重损害。



(2) 绿色产品标识。



Section 8: Warranty Information

For warranty information, go online to <https://www.elotouch.com/support/warranty>

Notes

www.elotouch.com

Visit our website for the latest

Product Information

Specifications

Upcoming Events

Press Releases

Software Drivers

Touch Monitor Newsletter

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

Americas

Tel +1 408 597 8000

elosales.na@elotouch.com

Europe (EMEA)

Tel +32 16 930 136

elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385

www.elotouch.com.cn



© 2025 Elo Touch Solutions, Inc. All rights reserved.