


Specifications

SM5KC Series	65SM5KC	55SM5KC	49SM5KC	43SM5KC	32SM5KC	
Screen Size	65	55	49	43	32	
Panel Technology	IPS					
Aspect Ratio	16:9					
Native Resolution	1,920 x 1,080 (FHD)					
Brightness	450 cd/m ²				400 cd/m ²	
Viewing Angle (H x V)	178 x 178					
Response Time	10 ms (G to G BW), 7.6 ms (WOT)	12 ms (G to G BW), 9.0 ms (WOT)	12 ms (G to G BW), 10.1 ms (WOT)	12 ms (G to G BW), 9.4 ms (WOT)	10 ms (G to G BW), 7.1 ms (WOT)	
Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1 % (Typ.))					
Life time (Typ.)	50,000 hrs (Typ.)					
Guaranteed Operating Hour	24 hrs					
Orientation	Portrait & Landscape					
Input	HDMI, DP, DVI-D, RGB, Audio, SD card					
Output	DP, Audio					
External Control	RS232C in/out, RJ in, IR Receiver, Pixel Sensor, USB 3.0, SD Card					
Bezel Color	Black					
Bezel Width	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	11.9 mm (T/R/L), 18 mm (B)	13 mm (T/R/L), 18 mm (B)	
Monitor Dimension (W x H x D)	1,456.9 x 838 x 41.1 mm	1,238 x 714.9 x 38.6 mm	1,102.2 x 638.5 x 38.6 mm	969.6 x 563.9 x 38.6 mm	729.4 x 428.9 x 55.5 mm	
Weight (Head)	27.7 kg	17.3 kg	14.1 kg	9.8 kg	5.2 kg	
Weight (Head + Stand)	32.9 kg	20.6 kg	17.4 kg	12.3 kg	6 kg	
Monitor with Optional Stand & Speaker Dimensions (W x H x D)	1,456.9 x 898.1 x 293.7 mm	1,238 x 773.4 x 219.6 mm	1,102.2 x 696.8 x 219.6 mm	969.6 x 622.2 x 193 mm	729.4 x 481 x 154.2 mm	
Weight (Head + Stand + Speaker)	33.4 kg	21.1 kg	17.9 kg	12.8 kg	6.5 kg	
Carton Dimensions (W x H x D)	1,561 x 977 x 190 mm	1,330 x 807 x 170 mm	1,197 x 760 x 166 mm	1,052 x 650 x 123 mm	810 x 510 x 132 mm	
Packed Weight	33.6 kg	21.5 kg	17.2 kg	12.4 kg	6.5 kg	
VESA™ Standard Mount Interface	300 x 300 mm	300 x 300 mm	300 x 300 mm	200 x 200 mm	200 x 200 mm	
SPECIAL FEATURES	Temperature Sensor, Auto Brightness Sensor, Tile Mode (Up to 15x15), DPM Select, DPM wake up, Energy Saving, Smart Energy Saving, File Play with USB, PIP/PBP (2), Internal Memory (8 GB), USB Cloning, Easy Brightness Control, Holiday Schedule, Limited Mode, Wake on LAN, Failover, Mirroring, BEACON, Embedded Template					
ENVIRONMENTAL CONDITIONS	Operating Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C	
Operating Humidity	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%	
POWER	Power Supply	100-240 V~, 50/60 Hz				
Power Type	Built-In Power					
Power Switch	No					
POWER CONSUMPTION	Typ.	120 W	100 W	85 W	75 W	60 W
Smart Energy Saving	85 W	70 W	60 W	55 W	45 W	
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC				
EMC	FCC Class "A" / CE / KCC					
ErP / Energy Star	N/A / Yes (Energy Star 7.0)				N/A / Yes (Energy Star 6.0)	
Audio Power	20 W (10 W x 2) for Internal Speaker (6 ohm)					
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes				
External Media Player Attachable	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700)	No	
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes				
SuperSign C	Yes					
ACCESSORY	Basic	Remote Controller (included 2ea batteries), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, Memory cover				
Optional	Speaker (SP-5000), Stand (ST-652T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100)	Speaker (SP-5000), Stand (ST-492T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100)	Speaker (SP-5000), Stand (ST-492T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HDBaseT (EB-B100)	Speaker (SP-5000), Stand (ST-432T), Pixel sensor (KT-SPO), Media player, Wall bracket (LSW230B), VESA Adapter (AM-B220S), OPS Kit (KT-OPSA), HDBaseT (EB-B100)	Speaker (SP-5000), Stand (ST-322T), Pixel sensor (KT-SPO), OPS Kit (KT-OPSA), HDBaseT (EB-B100)	

Connectivity

- 1 IR & LIGHT SENSOR
- 2 PIXEL SENSOR
- 3 HDMI
- 4 RS-232C IN
- 5 RS-232C OUT
- 6 AUDIO IN
- 7 AUDIO OUT
- 8 DVI-D IN
- 9 DP IN
- 10 DP OUT
- 11 RGB IN
- 12 LAN
- 13 USB 3.0
- 14 SD

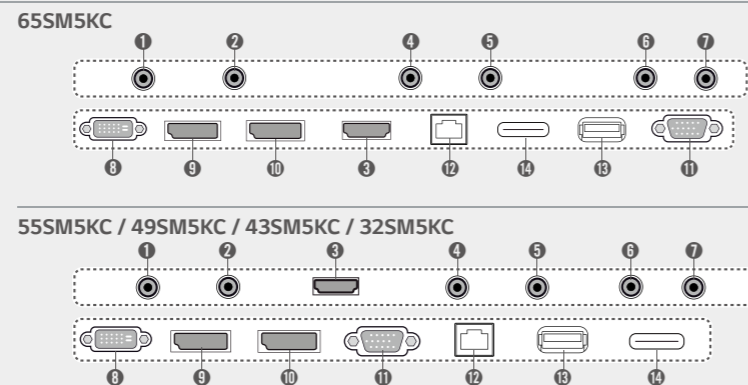

Download LG Commercial Display Mobile App




Learn more www.lg.com/b2b or www.lgcommercial.com

YouTube [youtube.com/c/LGCommercialDisplay](https://www.youtube.com/c/LGCommercialDisplay)

LG may make changes to specifications and product descriptions without notice. Copyright © 2016 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.



Smart Platform with a Powerful Embedded System-on-Chip Standard Performance SM5KC Series

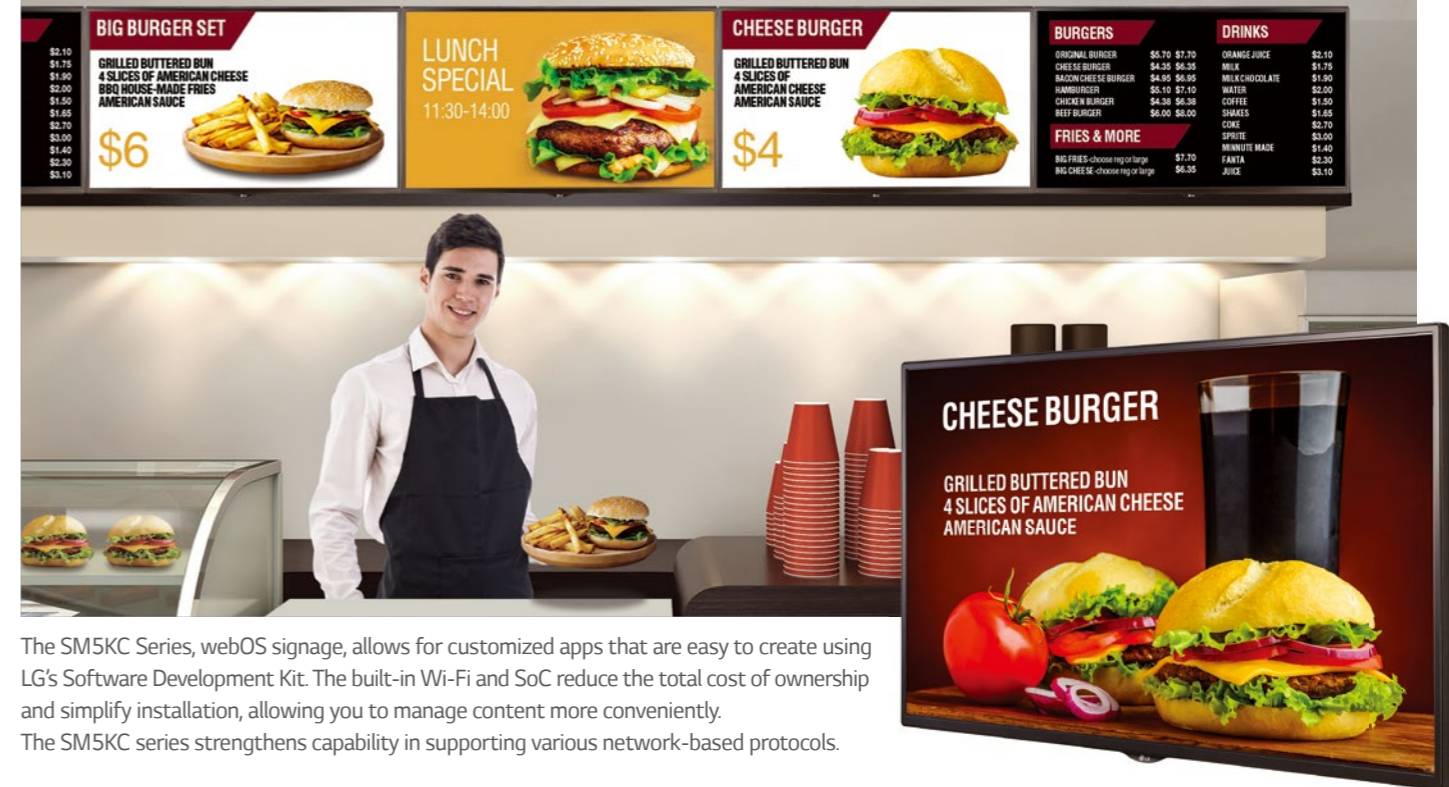

The SM5KC Series, webOS signage, allows for customized apps that are easy to create using LG's Software Development Kit. The built-in Wi-Fi and SoC reduce the total cost of ownership and simplify installation, allowing you to manage content more conveniently. The SM5KC series strengthens capability in supporting various network-based protocols.


Key Features

Smart Platform



Quad Core SoC*

The high-performance SoC can execute several tasks at the same time and provides smooth content playback.

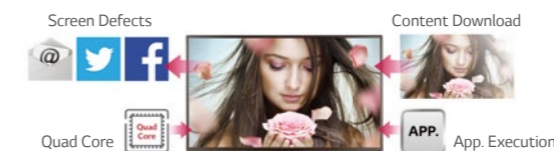

*System-on-Chip


webOS 3.0

The webOS 3.0 platform provides powerful and convenient creation tools, including app development materials.




Group Manager

Content can be created, distributed and controlled by a signage without a dedicated PC or server.

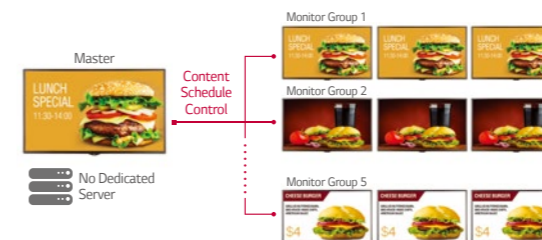

PBP (Picture-By-Picture) / PIP (Picture-In-Picture)

PBP (Picture-By-Picture) and PIP (Picture-In-Picture) features enable you to compose various layouts for several digital devices.

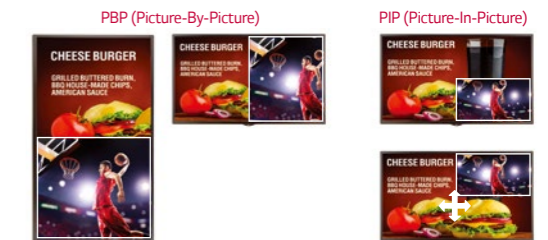

Smart Platform with a Powerful Embedded System-on-Chip

Standard Performance SM5KC Series



Screen Sizes


65"/55"/49"/43"/32"

10W x 2
Built-in Speaker

Back Side

SM5KC Series

- Brightness : 450 cd/m² (32" 400 cd/m²)
- Bezel : Top/Left/Right 11.9 mm (Bottom 18.0 mm)
- Depth : 38.6 mm
- Interface : HDMI, DVI, DP, RGB, RJ45, IR, RS232C, SD Card, USB
- Built-in Speaker : 10W + 10W




Key Features

Support Network Protocol

IP Streaming Protocol

Various types of IP video streaming protocol are supported, such as RTSP/RTP, MMS, HLS and MPEG-2 TS*.

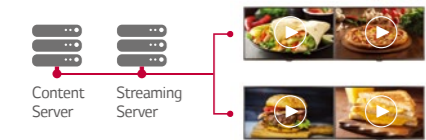

*RTSP (Real-Time Streaming Protocol), RTP (Real-time Transport Protocol), MMS (Microsoft Media Server), HLS (http live streaming)

Secure Communication Protocol

By supporting HTTPS* protocol, communication between server and signage is more secure.



*HTTPS: Hypertext Transfer Protocol over Secure Socket Layer

Proxy Server

Web access speed and security can be improved by supporting Proxy Server (A server that acts as an intermediary for requests from clients seeking resources from other servers.)



Built-in Wi-Fi

Mirroring

Content sharing is more convenient on a Wi-Fi network.



Soft AP

The SM5KC with Soft AP software can operate as a wireless access point for mobile devices.



Simple Installation

Installation has been simplified by removing the external media player and Ethernet/RS232C cables.



Wi-Fi (removing Ethernet or RS232C cables)
802.11n (2.4 GHz/5 GHz)

Supportive Convenience

BEACON

With BEACON and Bluetooth Low Energy (BLE) supported by SM5KC*, retail stores can provide coupons and information in real time.



* SM5KC is enhanced to support iBeacon** and Eddystone***
** iBeacon: Bluetooth Low Energy beacon profile released by Apple in 2013
*** Eddystone: Bluetooth Low Energy beacon profile released by Google in 2015

Enhanced Maintenance

Dust & Humidity Protection

Circuit board reliability is enhanced with conformal coating that protects against dust, iron powder, humidity and other harsh conditions.



Industrial Design

Detachable logo


The detachable logo allows for installation in the desired orientation: landscape or portrait mode.



Dimensions (unit: mm)


65"

1,456.9 x 838 x 41.1 /
27.7 kg

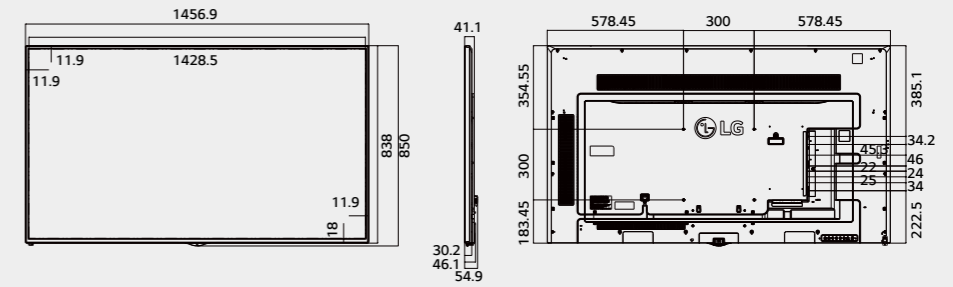


55"

1,238 x 714.9 x 38.6 /
17.3 kg

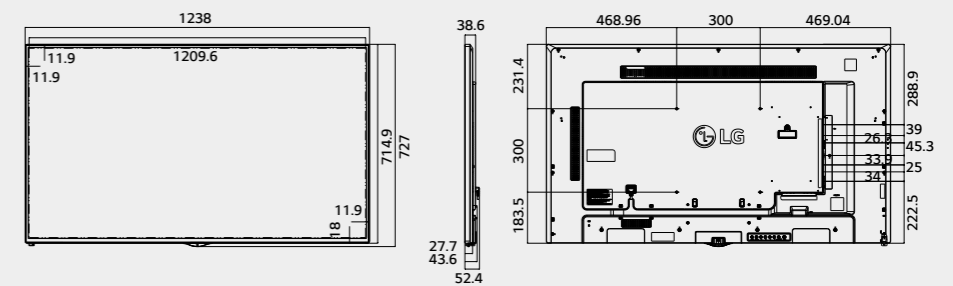


49"

1,102.2 x 638.5 x 38.6 /
14.1 kg

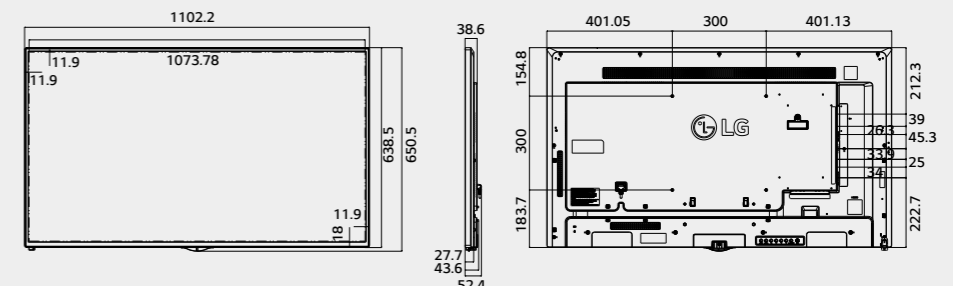

43"

969.6 x 563.9 x 38.6 /
9.8 kg

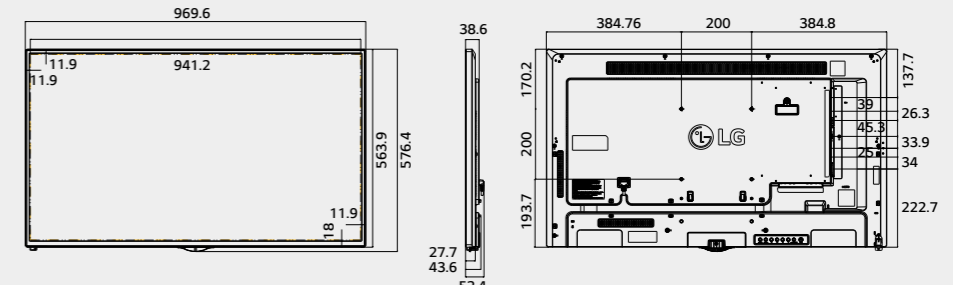

32"

729.4 x 428.9 x 55.5 /
5.2 kg

