English

SRP-350III

3 inch POS printer

Retail Hospitality Ticketing Kiosk

The Industry's **steady seller**

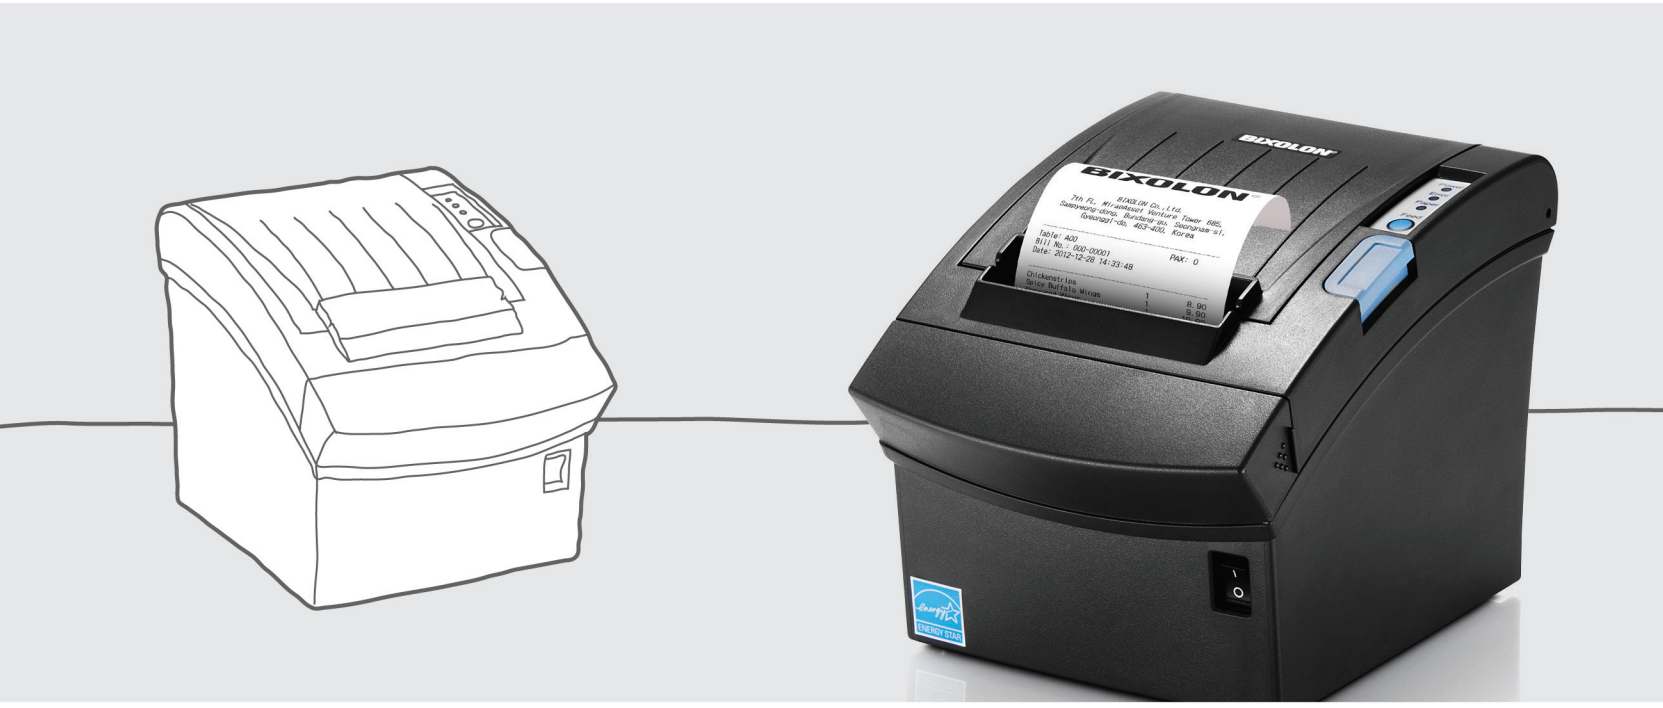

Powerful Printing Performance

- Fast printing up to 250mm/sec (25% faster than the SRP-350II)
- 4-type dithering options for graphic printing
- A family of the world-class SRP-350 line

Multiple interface choice

- Built-in USB with a choice of Serial, Parallel, or Ethernet

User-friendly Design

- Anti-jam guide
- Stand-alone or Space-saving wall-mount use
- 2" or 3" paper choice



BIXOLON®
a Better Solution for your Business™

SRP-350III

3 inch POS printer

Specifications

Print Characteristics

Print Method
Direct Thermal

Print Speed
SRP-350III: 250 mm/sec
SRP-352III: 230 mm/sec

Print Resolution
SRP-350III: 180 dpi
SRP-352III: 203 dpi

Print Width
Up to 72 mm

Sensor
Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type
Receipt

Media Width
80 mm
Optional 58 mm (with 2 inch Partition)

Media Roll Diameter
Up to 83 mm

Media Thickness
0.062 ~ 0.075 mm

Supply Method
Easy Paper Loading

Physical Characteristics

Dimensions (W x L x D)
145 x 204 x 146 mm
(5.70 x 8.03 x 5.74 inch)

Weight
1.55kg (3.41 lbs)

Power
EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port
2 ports (via y-type adaptor)

Performance Characteristics

Memory
64 Mbit SDRAM, 32 Mbit FlashROM

NV Image Memory
256 Kbytes (mono)

Receive Buffer
4 Kbytes

User Define Buffer
12 Kbytes

Interface
Dual Interface
USB V2.0 FS + Serial
USB V2.0 FS + Parallel
USB V2.0 FS + Ethernet

Environment Characteristics

Temperature
Operating: 0 ~ 45℃ (32 ~ 113℉)
Storage: -20 ~ 60℃ (-4 ~ 140℉)

Humidity
Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Printer Unit (MCBF)
70 Million Lines

Thermal Print Head (TPH)
150 km

Auto Cutter
1.8 Million Cuts

Software

Emulation
BXL / POS

Driver / Utility
Windows Driver, OPOS Driver, JPOS Driver,
Linux CUPS Driver, Mac Driver,
Virtual COM USB / Ethernet Driver, Utility Program

SDK
iOS SDK, Android SDK

Fonts / Graphics / Symbologies

Character Size
Font A: 12 × 24 Font B: 9 × 17 Font C: 9 × 24
KOR, CHN, JPN: 24 x 24

Characters Per Line
SRP-350III: Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21
SRP-352III: Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets
Alphanumeric: 95
Extended Graphics: 128 × 37 page
International: 32

Graphics
Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies
1D: Codabar, Code 39, Code 93, Code 128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E
2D: Data Matrix, PDF417, QR code

BR-SRP-350III-EN-MAR15-V2

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co.,Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.bixolon.com