

www.elotouch.com

Quick Installation Guide

Webcam

For all Elo Touch Solutions IDS Touchmonitors

Elo Touch Solutions Technical Support

Online self-help: www.elotouch.com/go/websupport

Technical Support contacts in your region:

www.elotouch.com/go/contactsupport

North America

Elo Touch Solutions
1033 McCarthy Boulevard
Milpitas, CA 95035

800-ELO-TOUCH
Tel +1 408 597 8000
Fax +1 408 597 8050
customerservice@elotouch.com

Europe

Tel +32 (0)16 70 45 00
Fax +32 (0)16 70 45 49
elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
Fax +86 (21) 3329 1400
www.elotouch.com.cn

Latin America

Tel 786-923-0251
Fax 305-931-0124
www.elotouch.com



The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo (logo) and Elo Touch Solutions are trademarks of Elo and its Affiliates.

© 2014 Elo Touch Solutions, Inc. All rights reserved.




Revision B
P/N E164990

Installation


Please go to www.elotouch.com/support to verify you have the latest drivers before installing this device.

Webcam P/N E688656

- 1 Disconnect AC power from the monitor and then remove the accessory port covers on the top of the monitor using a paperclip or tweezers.

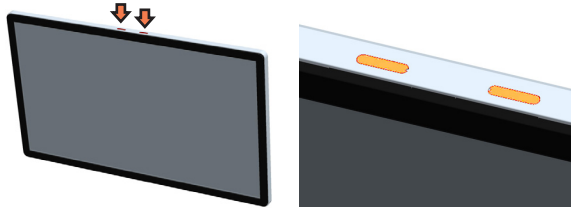

- 2 Connect the webcam cable to the connector under the accessory port and fasten the webcam to the monitor using the included screws.

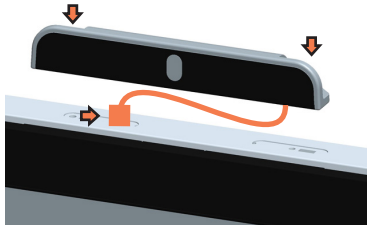

- 3 Adjust the camera viewing angle if desired using a 3mm hex wrench and then install the mylar covers for the mounting and adjustment screws.

