

SLT SERIES TOUCH AIO

SLEEK, "ZERO BEZEL" STYLE DESIGN

▶ 1037U Celeron or i3/i5/i7 Processors

▶ PCAP Multi-touch Capacitive

▶ New Ultra Slim Style



▶ Surface-mount Desk-mount,
or Front Panel-mount
(mounting hardware included)




▶ Clear Anodized
Aluminum
Bezel

SLT Series All-in-One:

- Intel Celeron 1037U 1.8GHz. Processor
- Intel Core-i3 Processor
- 12", 15", 17", 19", 21.5" LCD size
- PCAP Multi-touch
- 4GB - 8GB RAM - 16GB RAM
- 500GB HDD
- Optional Solid State HDD
- Integrated WiFi
- Integrated 2x 2 Watt Speakers
- Wall-mount - *Wall-mount Bracket Included*
- Panel-mount - *Panel-mount Clips Included*
- Desktop-mount - *Desk-mount Stand Included*
- Rugged metal enclosure
- Anodized aluminum Bezel
- Windows 7/8.1/10 Installed with recovery image
- Custom Software Configuration

SLT Series Typical I/O (21.5" shown)

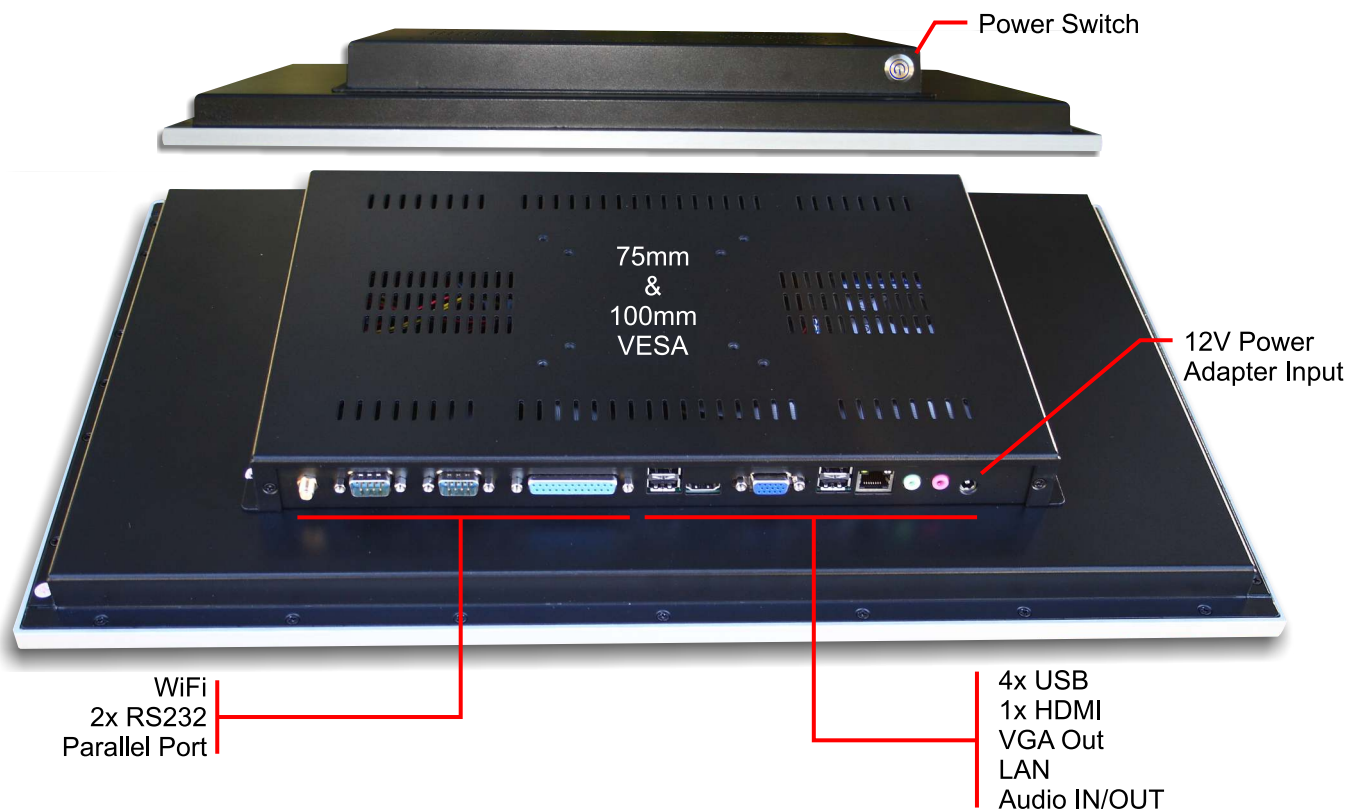

SLT SERIES TOUCH AIO

SLEEK, "ZERO BEZEL" STYLE DESIGN

▶ 1037U Celeron or i3/i5/i7 Processors

▶ PCAP Multi-touch Capacitive

▶ New Ultra Slim Style



▶ SLT Shown with
Included Desktop Stand

SLT Series Specifications - Celeron Processor

Model	SLT-12	SLT-15	SLT-17	SLT-19	SLT-21.5
Touchscreen	Multi-touch capacitive	Multi-touch capacitive	Multi-touch capacitive	Multi-touch capacitive	Multi-touch capacitive
Screen Size Diagonal	12.1"	15"	17"	19"	21.5"
Screen Aspect Ratio	4:3	4:3	4:3	16:9	16:9
CPU	1037U 1.8GHz.	1037U 1.8GHz.	1037U 1.8GHz.	1037U 1.8GHz.	1037U 1.8GHz.
Chipset	NM70	NM70	NM70	NM70	NM70
RAM	4GB	4GB	4GB	4GB	4GB
HDD	500GB	500GB	500GB	500GB	500GB
Video	Intel HD	Intel HD	Intel HD	Intel HD	Intel HD
Audio	Realtek HD Audio	Realtek HD Audio	Realtek HD Audio	Realtek HD Audio	Realtek HD Audio
WiFi	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n
LAN	RLT8111C	RLT8111C	RLT8111C	RLT8111C	RLT8111C
USB	4	4	4	4	4
RS-232	1	2	2	2	2
Parallel Port	—	1	1	1	1
HDMI	1	1	1	1	1
VGA Out	1	1	1	1	1
Audio I/O	Line Out/Mic In	Line Out/Mic In	Line Out/Mic In	Line Out/Mic In	Line Out/Mic In
Speakers	2	2	2	2	2
Screen Resolution (Native)	1024 x 768	1024 x 768	1280 x 1024	1280 x 1024	1920 x 1080
LCD Brightness (cd/m2)	450	400	300	350	300cd/m2
LCD Contrast	800 to 1	1000 to 1	1000 to 1	1000 to 1	5000 to 1
Viewing Angle (H/V)	160/160 Deg.	160/160 Deg.	160/160 Deg.	170/160 Deg.	135/130 Deg.
MTBF of LCD & Backlight	>50,000 Hrs.	>50,000 Hrs.	>50,000 Hrs.	>50,000 Hrs.	>50,000 Hrs.
Mount Hole Pattern	100mm VESA	100mm VESA	100mm VESA	100mm VESA	100mm VESA



i3/i5/i7
Specs

SLT SERIES TOUCH AIO

SLEEK, "ZERO BEZEL" STYLE DESIGN

▶ 1037U Celeron or i3/i5/i7 Processors

▶ PCAP Multi-touch Capacitive

▶ New Ultra Slim Style



▶ SLT Shown with
Included Desktop Stand

SLT Series Specifications - Intel Core-i3 Processor

Model	SLT-12-i3	SLT-15-i3	SLT-17-i3	SLT-19-i3	SLT-21.5-i3
Touchscreen	4 Point Projected Capacitive				
Screen Size Diagonal	12.1"	15"	17"	19"	21.5"
Screen Aspect Ratio	4:3	4:3	4:3	16:9	16:9
CPU	i3/i5/i7 4th Gen	i3/i5/i7 4th Gen	i3/i5/i7 4th Gen	i3/i5/i7 4th Gen	i3/i5/i7 4th Gen
Chipset	Haswell/H81	Haswell/H81	Haswell/H81	Haswell/H81	Haswell/H81
RAM Min/Max	4GB/16GB	4GB/16GB	4GB/16GB	4GB/16GB	4GB/16GB
HDD	500GB	500GB	500GB	500GB	500GB
Video	Intel HD 4400	Intel HD 4400	Intel HD 4400	Intel HD 4400	Intel HD 4400
Audio	Realtek HD Audio	Realtek HD Audio	Realtek HD Audio	Realtek HD Audio	Realtek HD Audio
WiFi	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n
LAN	RLT8111C	RLT8111C	RLT8111C	RLT8111C	RLT8111C
USB	4	4	4	4	4
RS-232	1	2	2	2	2
HDMI	1	1	1	1	1
VGA Out	1	1	1	1	1
Audio I/O	Line Out/Mic In	Line Out/Mic In	Line Out/Mic In	Line Out/Mic In	Line Out/Mic In
Speakers	2	2	2	2	2
Screen Resolution (Native)	1024 x 768	1024 x 768	1280 x 1024	1280 x 1024	1920 x 1080
LCD Brightness (cd/m2)	450	400	300	350	300cd/m2
LCD Contrast	800 to 1	1000 to 1	1000 to 1	1000 to 1	5000 to 1
Viewing Angle (H/V)	160/160 Deg.	160/160 Deg.	160/160 Deg.	170/160 Deg.	135/130 Deg.
MTBF of LCD & Backlight	>50,000 Hrs.	>50,000 Hrs.	>50,000 Hrs.	>50,000 Hrs.	>50,000 Hrs.
Mount Hole Pattern	100mm VESA	100mm VESA	100mm VESA	100mm VESA	100mm VESA

