



Features

- Solid Aluminum Die-casting chassis
- Variety of LCD panel type selections
- Front bezel IP65
- VGA/DVI input
- 9~36V DC wide range power input

Specifications

LCD

Display Type	8" TFT-LCD
Max. Resolution	800x600
Max. Color	16.2M
Luminance (cd/m ²)	350
View Angle	H:140° / V:125°
Backlight Lifetime	40,000 hrs
Contrast	500:1
Power Consumption	TBD

System

OSD Control	5 keys
Membrane	
External I/O Port	1 x VGA, 1 x DVI USB interface for touch RS-232 for resistive touch 1x tack switch for VGA/DVI switching 1x Line in by phone jack for option 3 pins terminal block
Power Input	9~36V DC
Touch Screen	108P: Projected Capacitive Touch 108: Resistive Touch Window
Light Transmission	ARCDIS-108P: 90% ARCDIS-108: 80%

Mechanical


Construction	Aluminum Die-casting chassis
IP Rating	IP65 front panel
Mounting	Panel mounting, VESA 75 x 75
Dimension	231 x 176 x 51
Net Weight	1.8 kg

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10 to 90% @ 40°C, non-condensing
Certificate	CE/FCC Class A

Dimension

ARCDIS-108

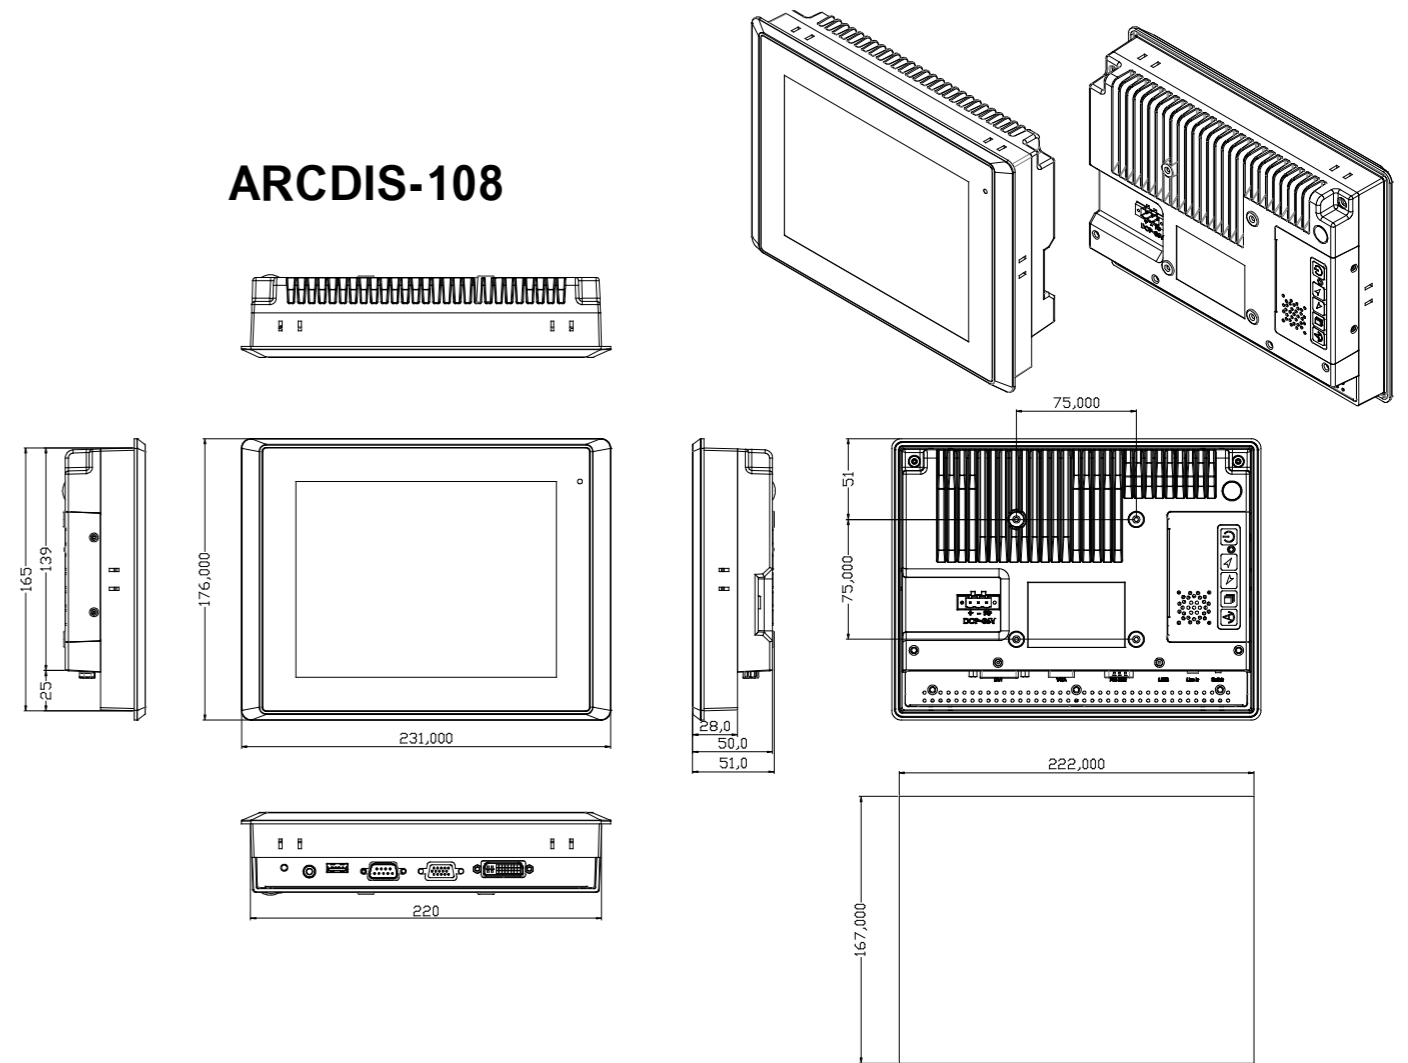

Mounting Hole Size