

## G80-3000



Models may vary from the image shown

### Accurate and reliable even after years of service

The timeless keyboard for high-volume data input and for the most demanding requirements. Durable, reliable and sure switching action. Proven millions of times over. The G80-3000 standard PC keyboard is based on the reliable MX technology with Gold Crosspoint contacts.

### Key Benefits

- Individual keys with Gold Crosspoint contacts (MX technology)
- Codeset 3 support (PS/2 connection only) e.g. for Unix computers
- Perfect key feeling
- High-quality keyboard for outstanding writing performance, fulfilling even the highest demands
- Extremely high service life of individual keys
- Three different types of actuation: linear, soft or click pressure point
- Compatible for PCs and Macs via USB connection
- incl. adapter for PS/2 interface

### Technical Data:

#### Layout (country or language):

Product dependant, see table "Models"

#### Housing Color:

Product dependant, see table "Models"

#### Key Color:

Product dependant, see table "Models"

#### Weight (product):

935 g / 2.06 lb

#### Total Weight (with packaging):

1150 g / 2.54 lb

#### Cable Length:

approx. 1.75 m / approx. 5.74 ft

#### Storage Temperature:

-20°C to 60°C / -4° F to 140° F

#### Operating Temperature:

0°C to 50°C / 32° F to 122° F

#### Current Consumption:

typ. 15 mA

#### Interface:

- USB (PS/2 via adapter)

#### Product Approvals:

- UL Recognized Component Approval
- C-Tick
- VCCI
- CE
- FCC
- VDE
- BSMI



#### System Requirements:

- USB or PS/2 connection

#### Box Contents:

- G80-3000
- Printed instructions
- Adapter (USB port on PS/2 plug)

#### Dimensions (product):

approx. 470 x 195 x 44 mm / approx. 18.50 x 7.68 x 1.73 in

#### Packaging Dimensions:

approx. 500 x 255 x 50 mm / approx. 19.69 x 10.04 x 1.97 in

#### Reliability:

- MTBF > 80,000 hours
- MCBF > 10 bill. operations

#### Keyboard:

- Key Technology: MX
- Service life, standard key: > 50 million key operations
- Operation Characteristics: Product dependant, see table "Models"

- Inscription Technology: Laser
- Inscription Layout: Standard
- Number of Keys: Product dependant, see table "Models"

**Packaging Unit:**

- Number of products in the master package: 45
- Number of master packages per pallet: 2

**Warranty:**

3-year limited manufacturer's guarantee

For the first two years after delivery, the statutory warranty applies. In the third year after delivery, CHERRY voluntarily grants an additional warranty according to the following conditions ("extended warranty"). In the event of a defect, please contact the seller of your CHERRY product. Do not carry out any repairs on your own and do not open the product. There is no warranty if unauthorized changes to the product cause a defect.

Conditions for the extended warranty:

In the case of a defect after the first 2 years after delivery of the CHERRY product, CHERRY grants its customers for the additional period of one year the right to assert claims for cure, i.e. demand that the defect is remedied or a thing free of defects is supplied. The extended warranty is to be asserted against the seller of the CHERRY product upon presentation of the original invoice, proof of purchase or a comparable proof of the time of purchase.

CHERRY, and the seller of the CHERRY product, where applicable, shall remedy the defect in the event the customer has justified claims for cure under the terms of the extended warranty.

Excluded from the extended warranty are damages caused by improper use, in particular by the effects of chemical substances, other damages caused by external influences, as well as normal wear and tear and optical changes, in particular discoloration or abrasion of shiny areas. Also excluded from the extended warranty are accessories and other parts which are not an integral part of the purchased item.

Errors, technical changes and delivery delays may occur. Technical information refers only to the specifications of the products. Features may differ from the information provided.

## Models:


(possible country/layout versions, others available on request)

	Product Name	Order Number	EAN Code	Layout (country or language)	Housing Color	Key Color	Operation Characteristics <sup>1</sup>	Number of Keys
1	G80-3000	G80-3000LPCCD-0	4025112076121	Canada	light grey	light grey	BLACK SWITCH Linear (60 cN)	105
2	G80-3000	G80-3000LPCDE-0	4025112058530	Germany	light grey	light grey	BLACK SWITCH Linear (60 cN)	105
3	G80-3000	G80-3000LPCDE-2	4025112058547	Germany	black	black	BLACK SWITCH Linear (60 cN)	105
4	G80-3000	G80-3000LPCES-0	4025112058561	Spain	light grey	light grey	BLACK SWITCH Linear (60 cN)	105
5	G80-3000	G80-3000LPCES-2	4025112058578	Spain	black	black	BLACK SWITCH Linear (60 cN)	105
6	G80-3000	G80-3000LPCEU-0	4025112058585	US English with EURO symbol	light grey	light grey	BLACK SWITCH Linear (60 cN)	104
7	G80-3000	G80-3000LPCEU-2	4025112061073	US English with EURO symbol	black	black	BLACK SWITCH Linear (60 cN)	104
8	G80-3000	G80-3000LPCFR-0	4025112058592	France	light grey	light grey	BLACK SWITCH Linear (60 cN)	105
9	G80-3000	G80-3000LPCGB-0	4025112058608	UK	light grey	light grey	BLACK SWITCH Linear (60 cN)	105
10	G80-3000	G80-3000LPCGB-2	4025112061646	UK	black	black	BLACK SWITCH Linear (60 cN)	105
11	G80-3000	G80-3000LPCRB-0	4025112059230	English (US) / Cyrillic	light grey	light grey	BLACK SWITCH Linear (60 cN)	104
12	G80-3000	G80-3000LPCRB-2	4025112059247	English (US) / Cyrillic	black	black	BLACK SWITCH Linear (60 cN)	104
13	G80-3000	G80-3000LPCRC-0	4025112076145	English (US) / Chinese	light grey	light grey	BLACK SWITCH Linear (60 cN)	104
14	G80-3000	G80-3000LPCRC-2	4025112068805	English (US) / Chinese	black	black	BLACK SWITCH Linear (60 cN)	104


	Product Name	Order Number	EAN Code	Layout (country or language)	Housing Color	Key Color	Operation Characteristics <sup>1</sup>	Number of Keys
15	G80-3000	G80-3000LSCDE-0	4025112058660	Germany	light grey	light grey	BLUE SWITCH Click pressure point (60cN)	105
16	G80-3000	G80-3000LSCDE-2	4025112063381	Germany	black	black	BLUE SWITCH Click pressure point (60cN)	105
17	G80-3000	G80-3000LSCEU-0	4025112058677	US English with EURO symbol	light grey	light grey	BLUE SWITCH Click pressure point (60cN)	104
18	G80-3000	G80-3000LSCEU-2	4025112067020	US English with EURO symbol	black	black	BLUE SWITCH Click pressure point (60cN)	104
19	G80-3000	G80-3000LSCGB-0	4025112058684	UK	light grey	light grey	BLUE SWITCH Click pressure point (60cN)	105
20	G80-3000	G80-3000LSCGB-2	4025112066290	UK	black	black	BLUE SWITCH Click pressure point (60cN)	105
21	G80-3000	G80-3000LSCRC-2-	4025112073854	English (US) / Chinese	black	black	BLUE SWITCH Click pressure point (60cN)	104
22	G80-3000	G80-3000LXCEU-0	4025112061806	US English with EURO symbol	light grey	light grey	BROWN SWITCH Pressure point (55cN)	104
23	G80-3000	G80-3000LXCEU-2	4025112067808	US English with EURO symbol	black	black	BROWN SWITCH Pressure point (55cN)	104

## 1 Operation Characteristics:

- BLACK SWITCH Linear (60 cN)

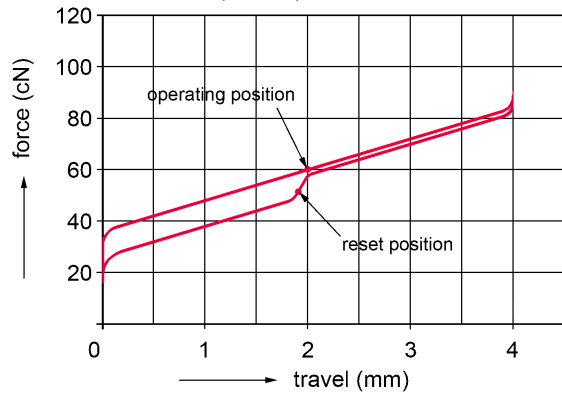

- BLUE SWITCH Click pressure point (60cN)

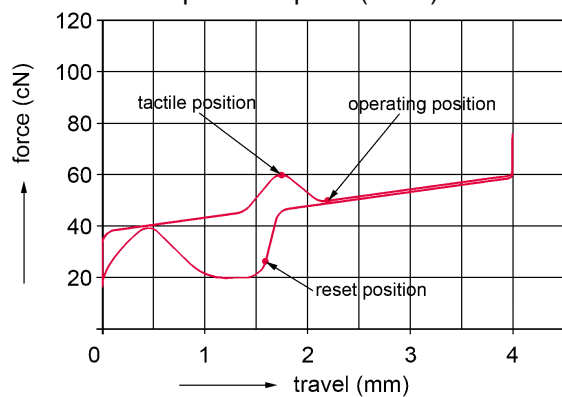

- BROWN SWITCH Pressure point (55cN)

