

THIS DRAWING IS A CONTROLLED DOCUMENT.
REV MS600279


CONNECTOR PINOUT	
PIN NO	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

TYCO (AMP)
487378-4
OR EQUIVALENT

PIN 1

PIN 5


CABLE 5 POSITION
DETAIL A
NTS

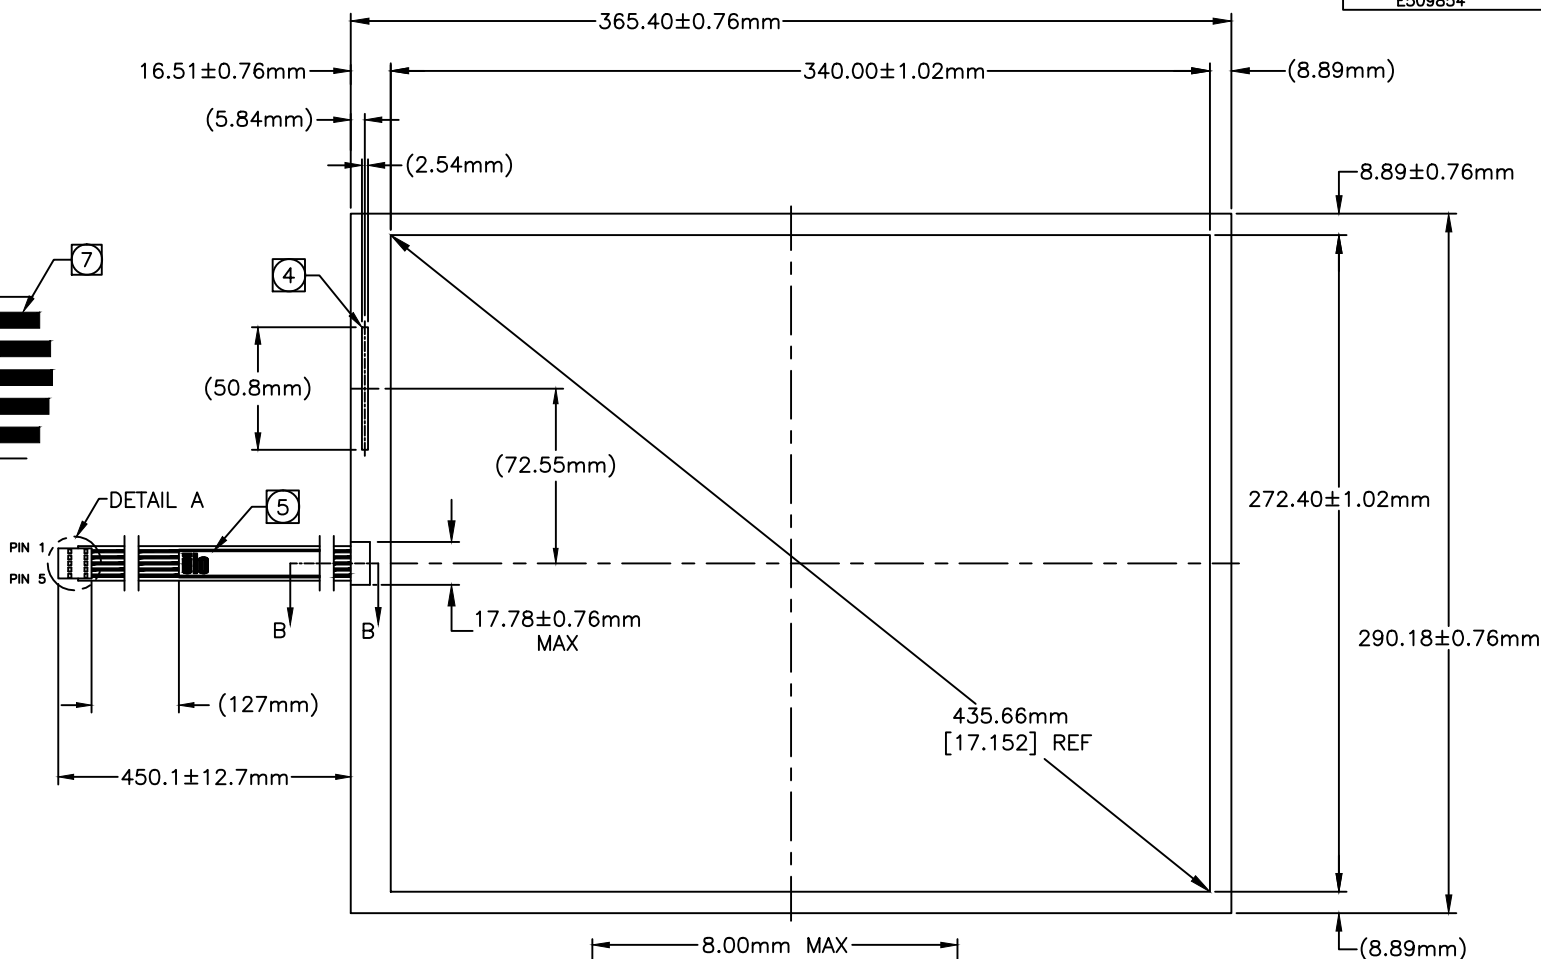

PIN 1
PIN 5

DETAIL A

B

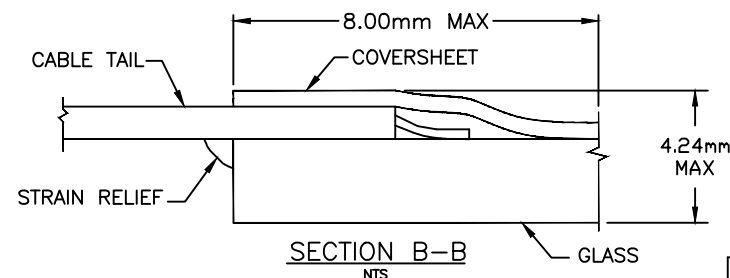

NOTES:

1. GLASS THICKNESS 3.18mm NOMINAL.
2. FINISHED PART THICKNESS 3.48mm NOMINAL.
3. FINISHED PART THICKNESS AT CABLE ATTACHMENT AREA 4.24mm MAX.
4. FINISHED PART THICKNESS AT COVERSHEET CONTACT 3.86mm MAX.
5. LABEL TO BE ATTACHED TO FRONT SIDE OF CABLE.
6. CABLE IS ATTACHED TO THE LEFT SIDE OF TOUCHSCREEN AT CENTER POINT AS SHOWN.
7. PIN 1 TO BE LOCATED AS SHOWN (SEE DETAIL A).

LOC
DIST

C	REV PER ECO-13-0174, REMOVED TOUCH SOLUTIONS FROM LOGO	06/01/13	DI	
B	REVISED PER ECO-12-015013 ELO TITLE BLOCK WAS TE	09/10/12	DI	
A	INITIAL RELEASE	02/17/06		
P	LTR	REVISION RECORD	DATE	DWG APVD

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
ANGLES ± -	
SURFACE TEXTURE	N/A

DWN	MATERIAL	ACCUTOUCH	HEAT TREAT
CHK			
APVD			
NAME	DIMENSIONAL DRAWING, SCN-A5-FLT17.1-Z01-0H1-R		
SCALE	SIZE	DRAWING NO	SHEET
1:1	A2	MS600279	1 of 1
REV	C		

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS. IT IS TO BE KEPT SECRET AND NOT DISCLOSED TO ANYONE, OTHER THAN ELO PERSONNEL, WITHOUT THE AUTHORIZATION FROM ELO (www.elotouch.com).