CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

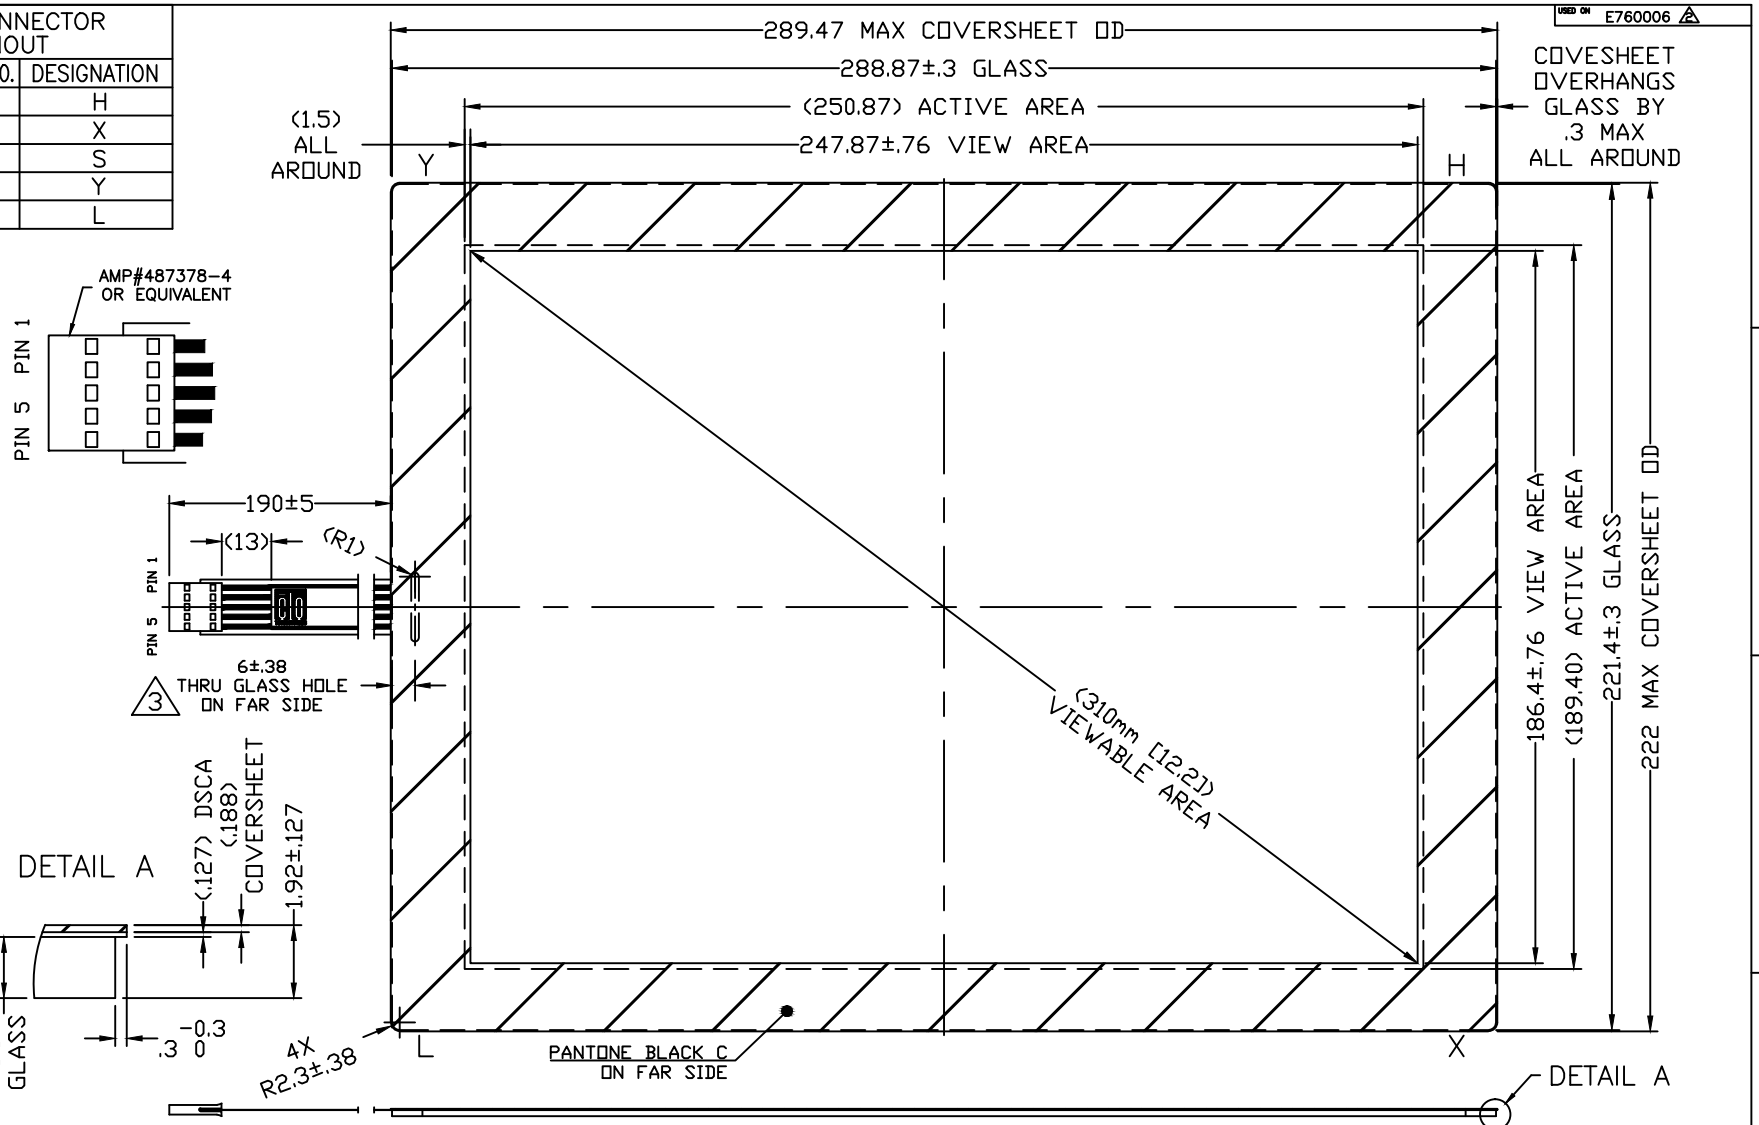

NOTES:
1. GLASS THICKNESS 1.6mm NOMINAL.
2. FINISHED PART THICKNESS 1.92mm±0.127MM.

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	ECO-11-021669: INITIAL RELEASE	10/28/11	QC	QC
	3	SHOWED LOCATION OF THRU HOLE ON GLSS	08/19/11	QC	QC
	2	CORRECTED P/N TO E760006	05/10/11	QC	QC
	1	INITIAL LAYOUT	05/06/11	QC	QC

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 1
1 PLC ± .2
2 PLC ± .3
3 PLC ± .4
4 PLC ± .8
ANGLES ± 5
SURFACE TEXTURE N/A

DWN Q. CHUNG 05/06/11
CHK
APVD Q. CHUNG 05/10/11
NAME
MATERIAL RESISTIVE (ACCUTOUCH)
HEAT TREAT N/A N/A
TE Connectivity
MARKETING DRAWING
SCN-A5-FZT12.1-Z01-0H1-R
SCALE 1:1 SIZE A2 DRAWING NO MS601169 SHEET 1 OF 1 REV A

DWG NO MS601169

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS SUBSIDIARIES AND AFFILIATES (TE). IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TE PERSONNEL, WITHOUT AUTHORIZATION FROM TE (www.TE.com).

LOC 08
DIST 08

3307-7 (3/11)