


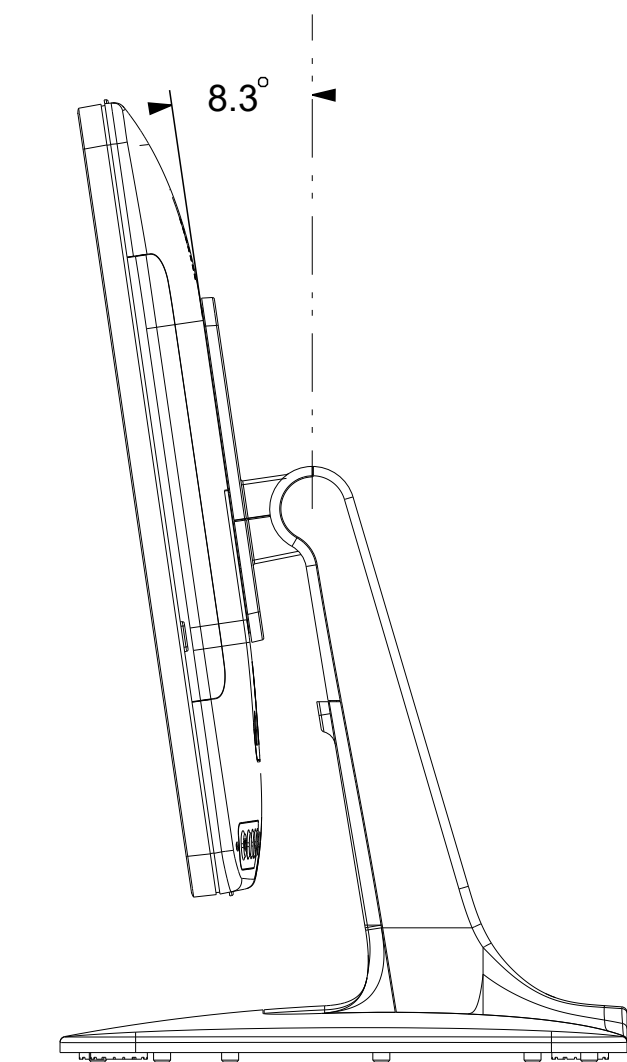


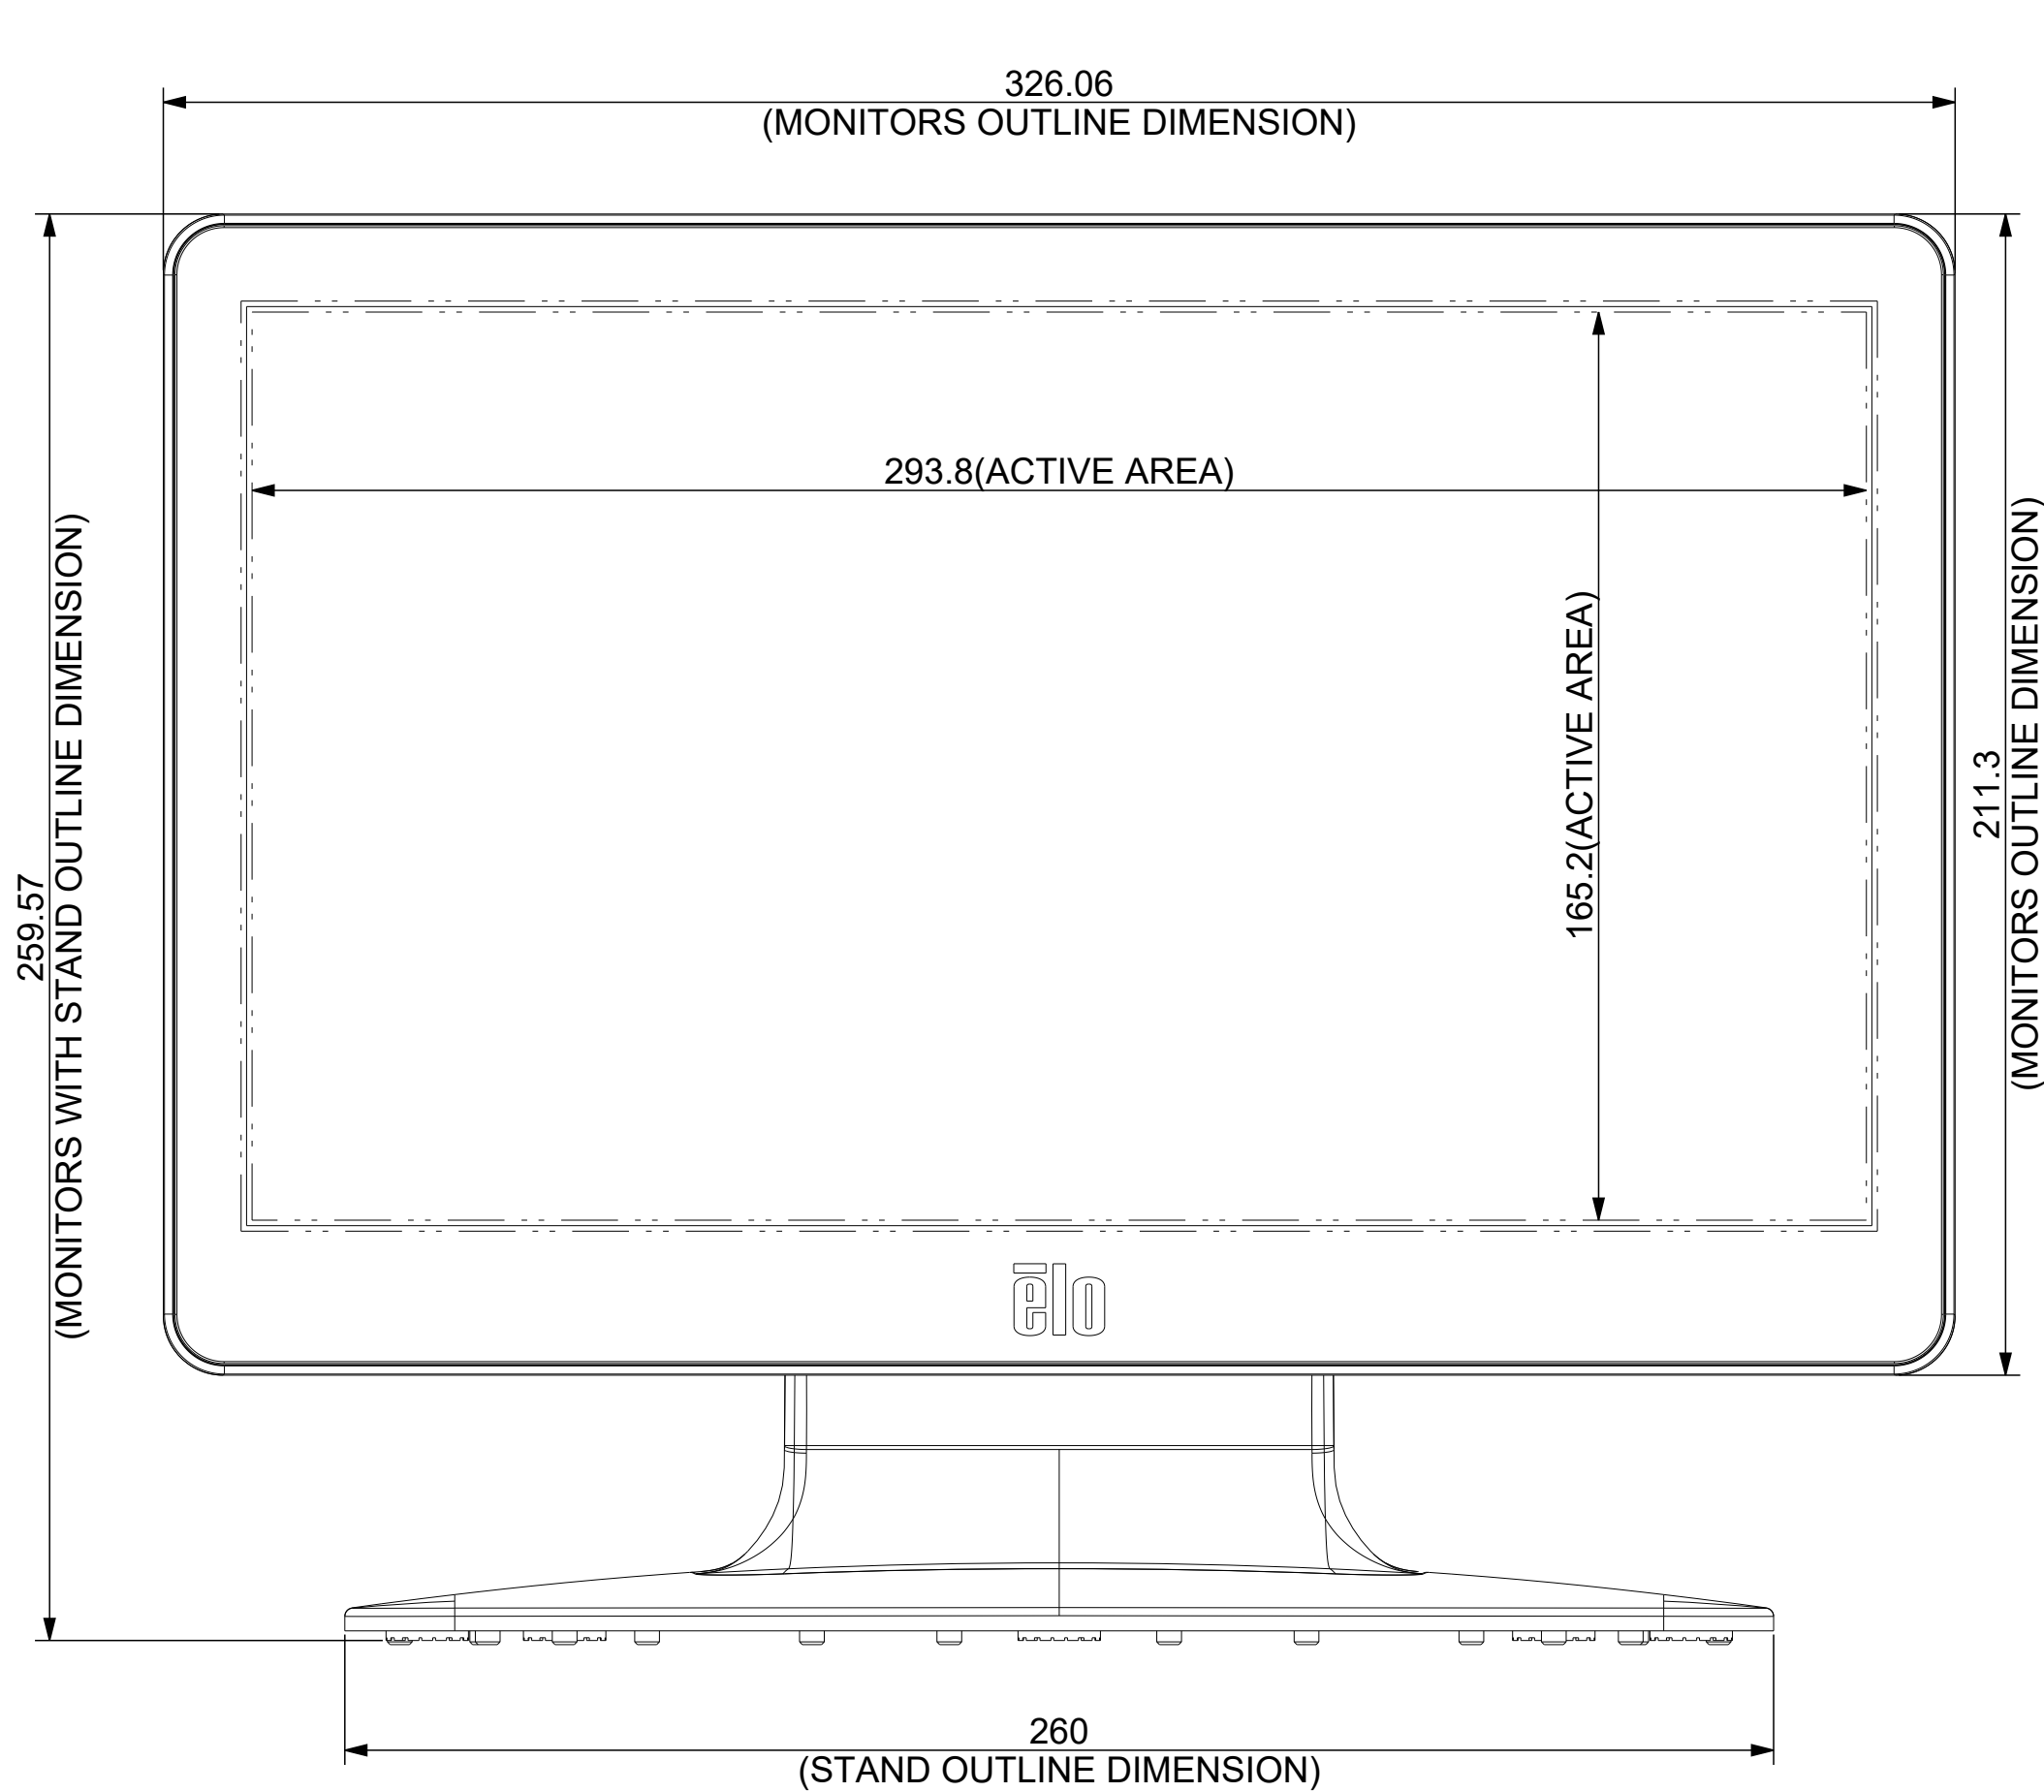


DISPLAY ANGLE RANGE
IN LOW POSITION

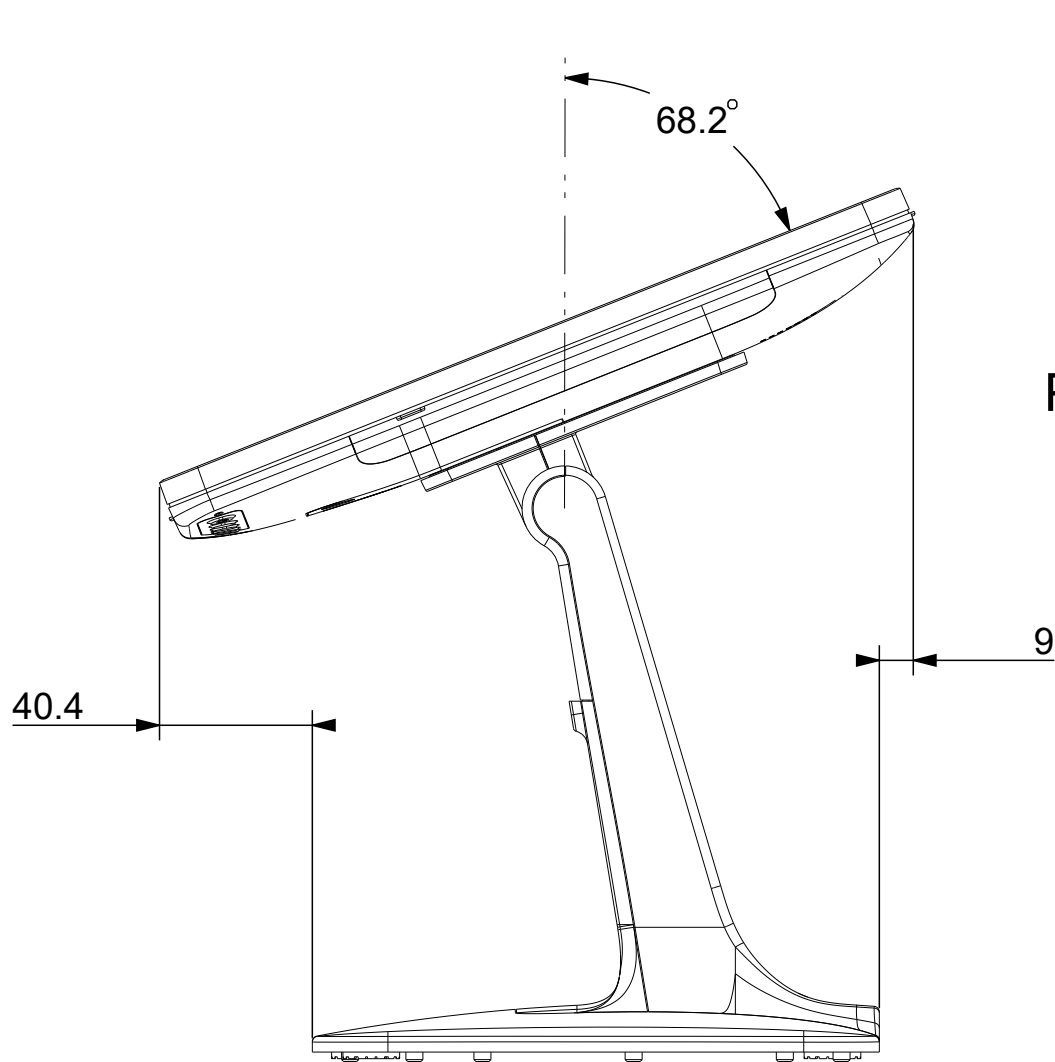

DISPLAY ANGLE RANGE
IN HIGH POSITION

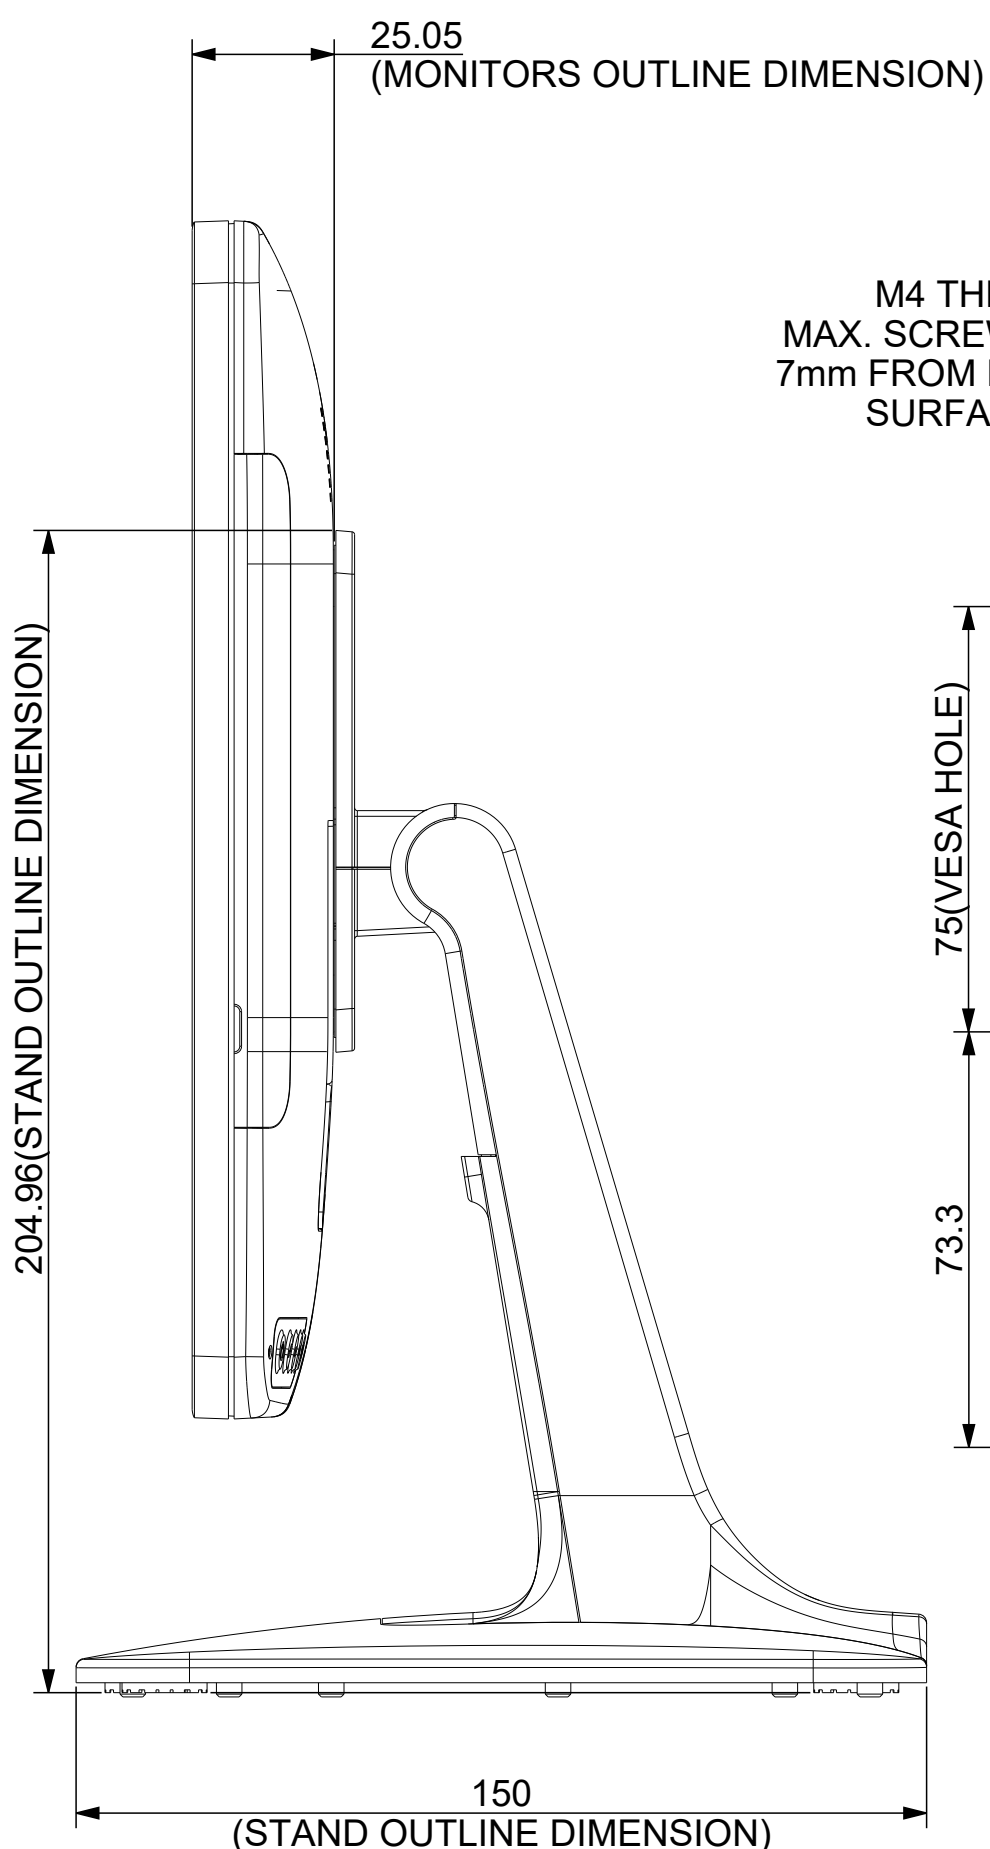


M4 THREAD,
MAX. SCREW LENGTH
7mm FROM MOUNTING
SURFACE, X4

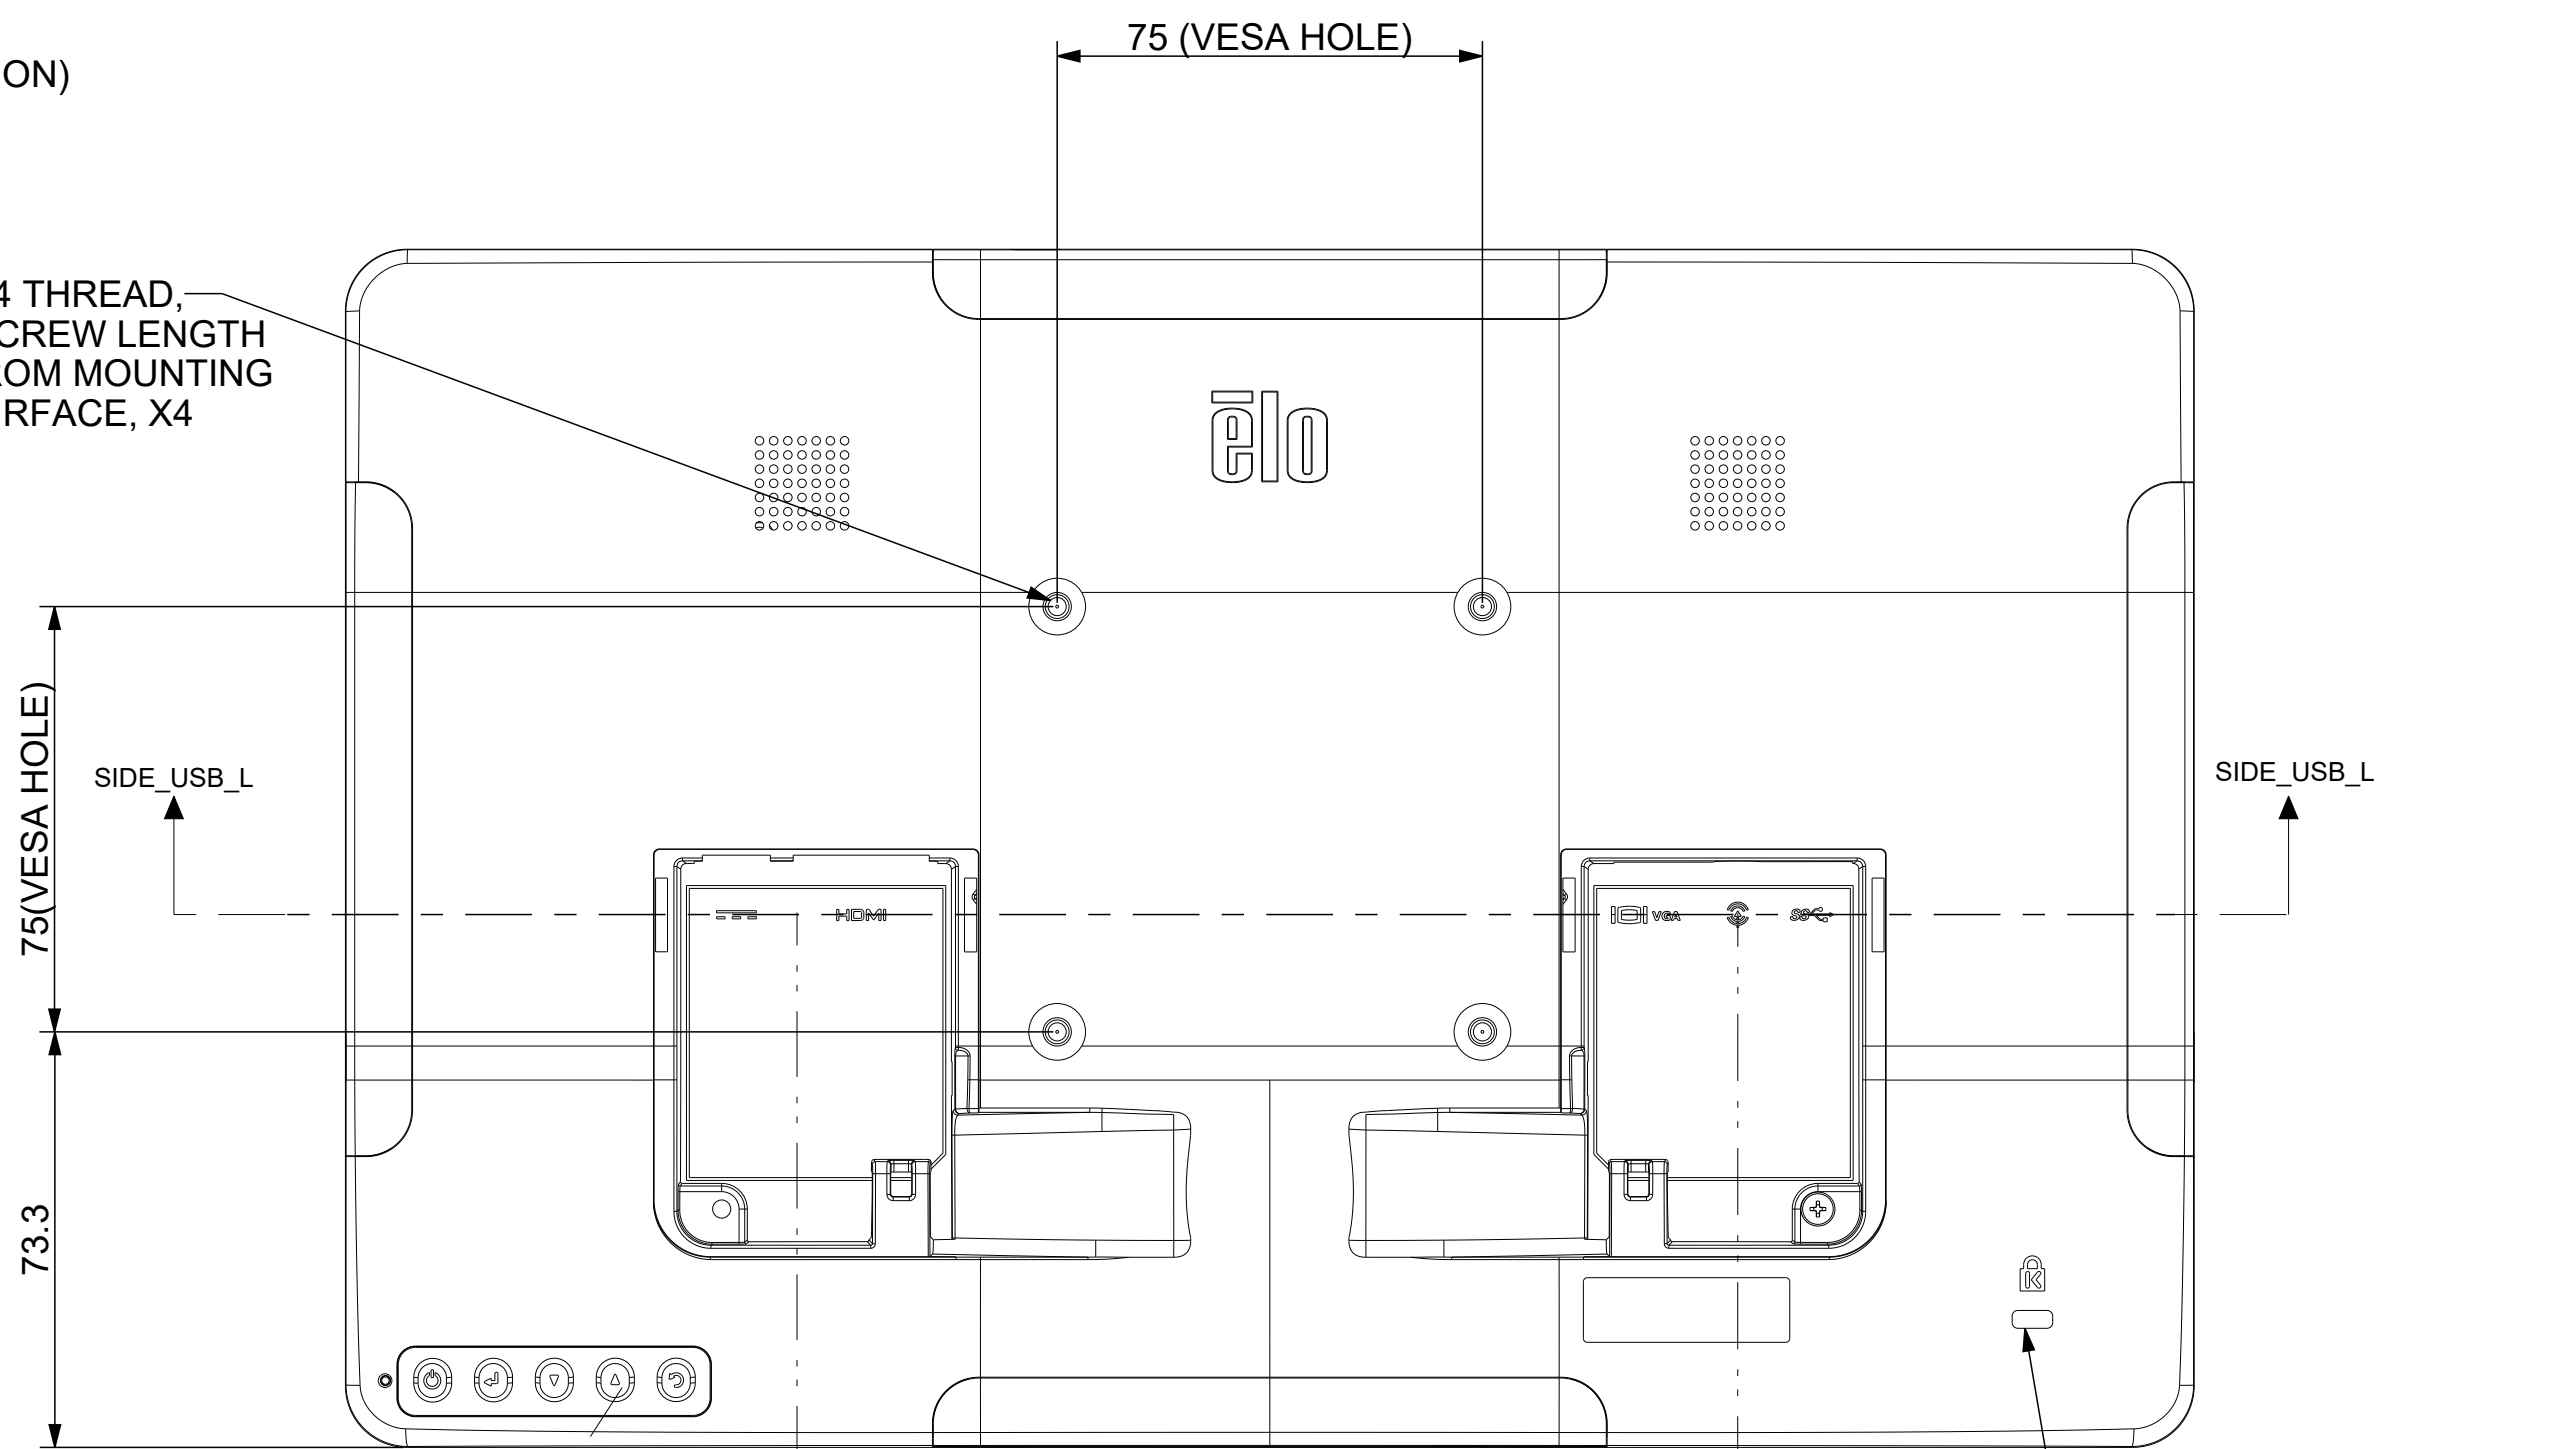


POWER STATUS LED

OSD CONTROLS

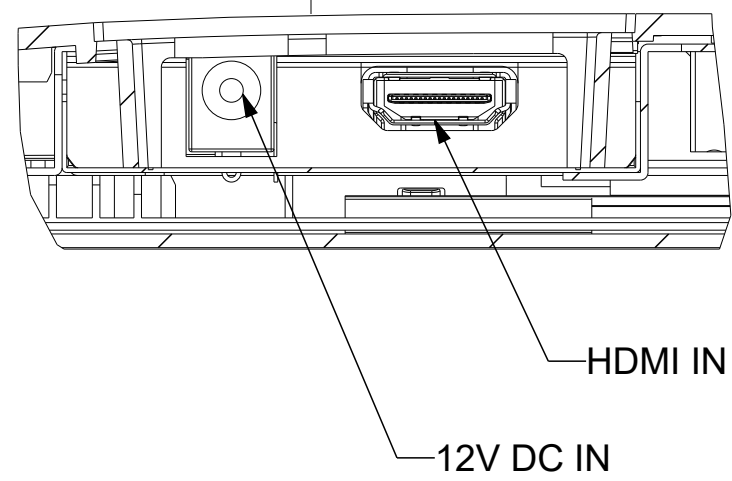

HDMI IN

12V DC IN


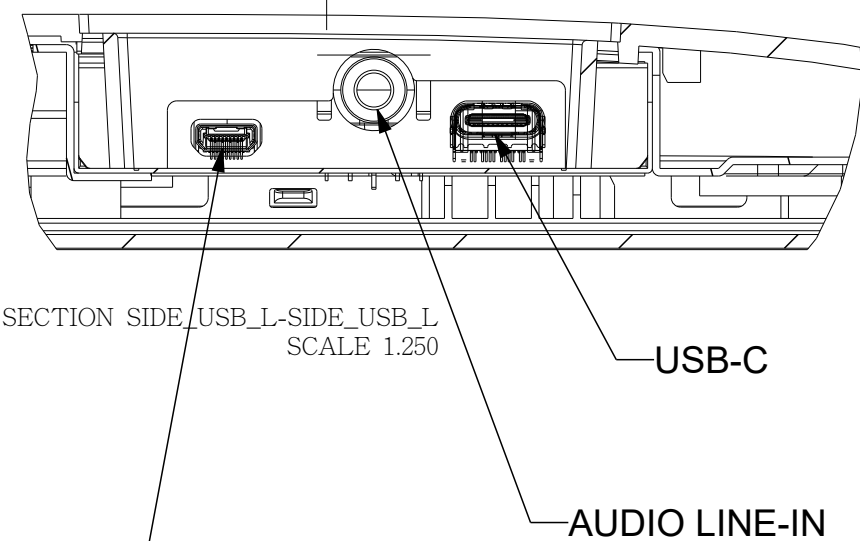


SECTION SIDE/USB_L-SIDE_USB_L
SCALE 1.250

USB-C

AUDIO LINE-IN

VGA IN
(VGA-DB15-to-MICRO)
VGA-DB15 to MICRO cable sold separately

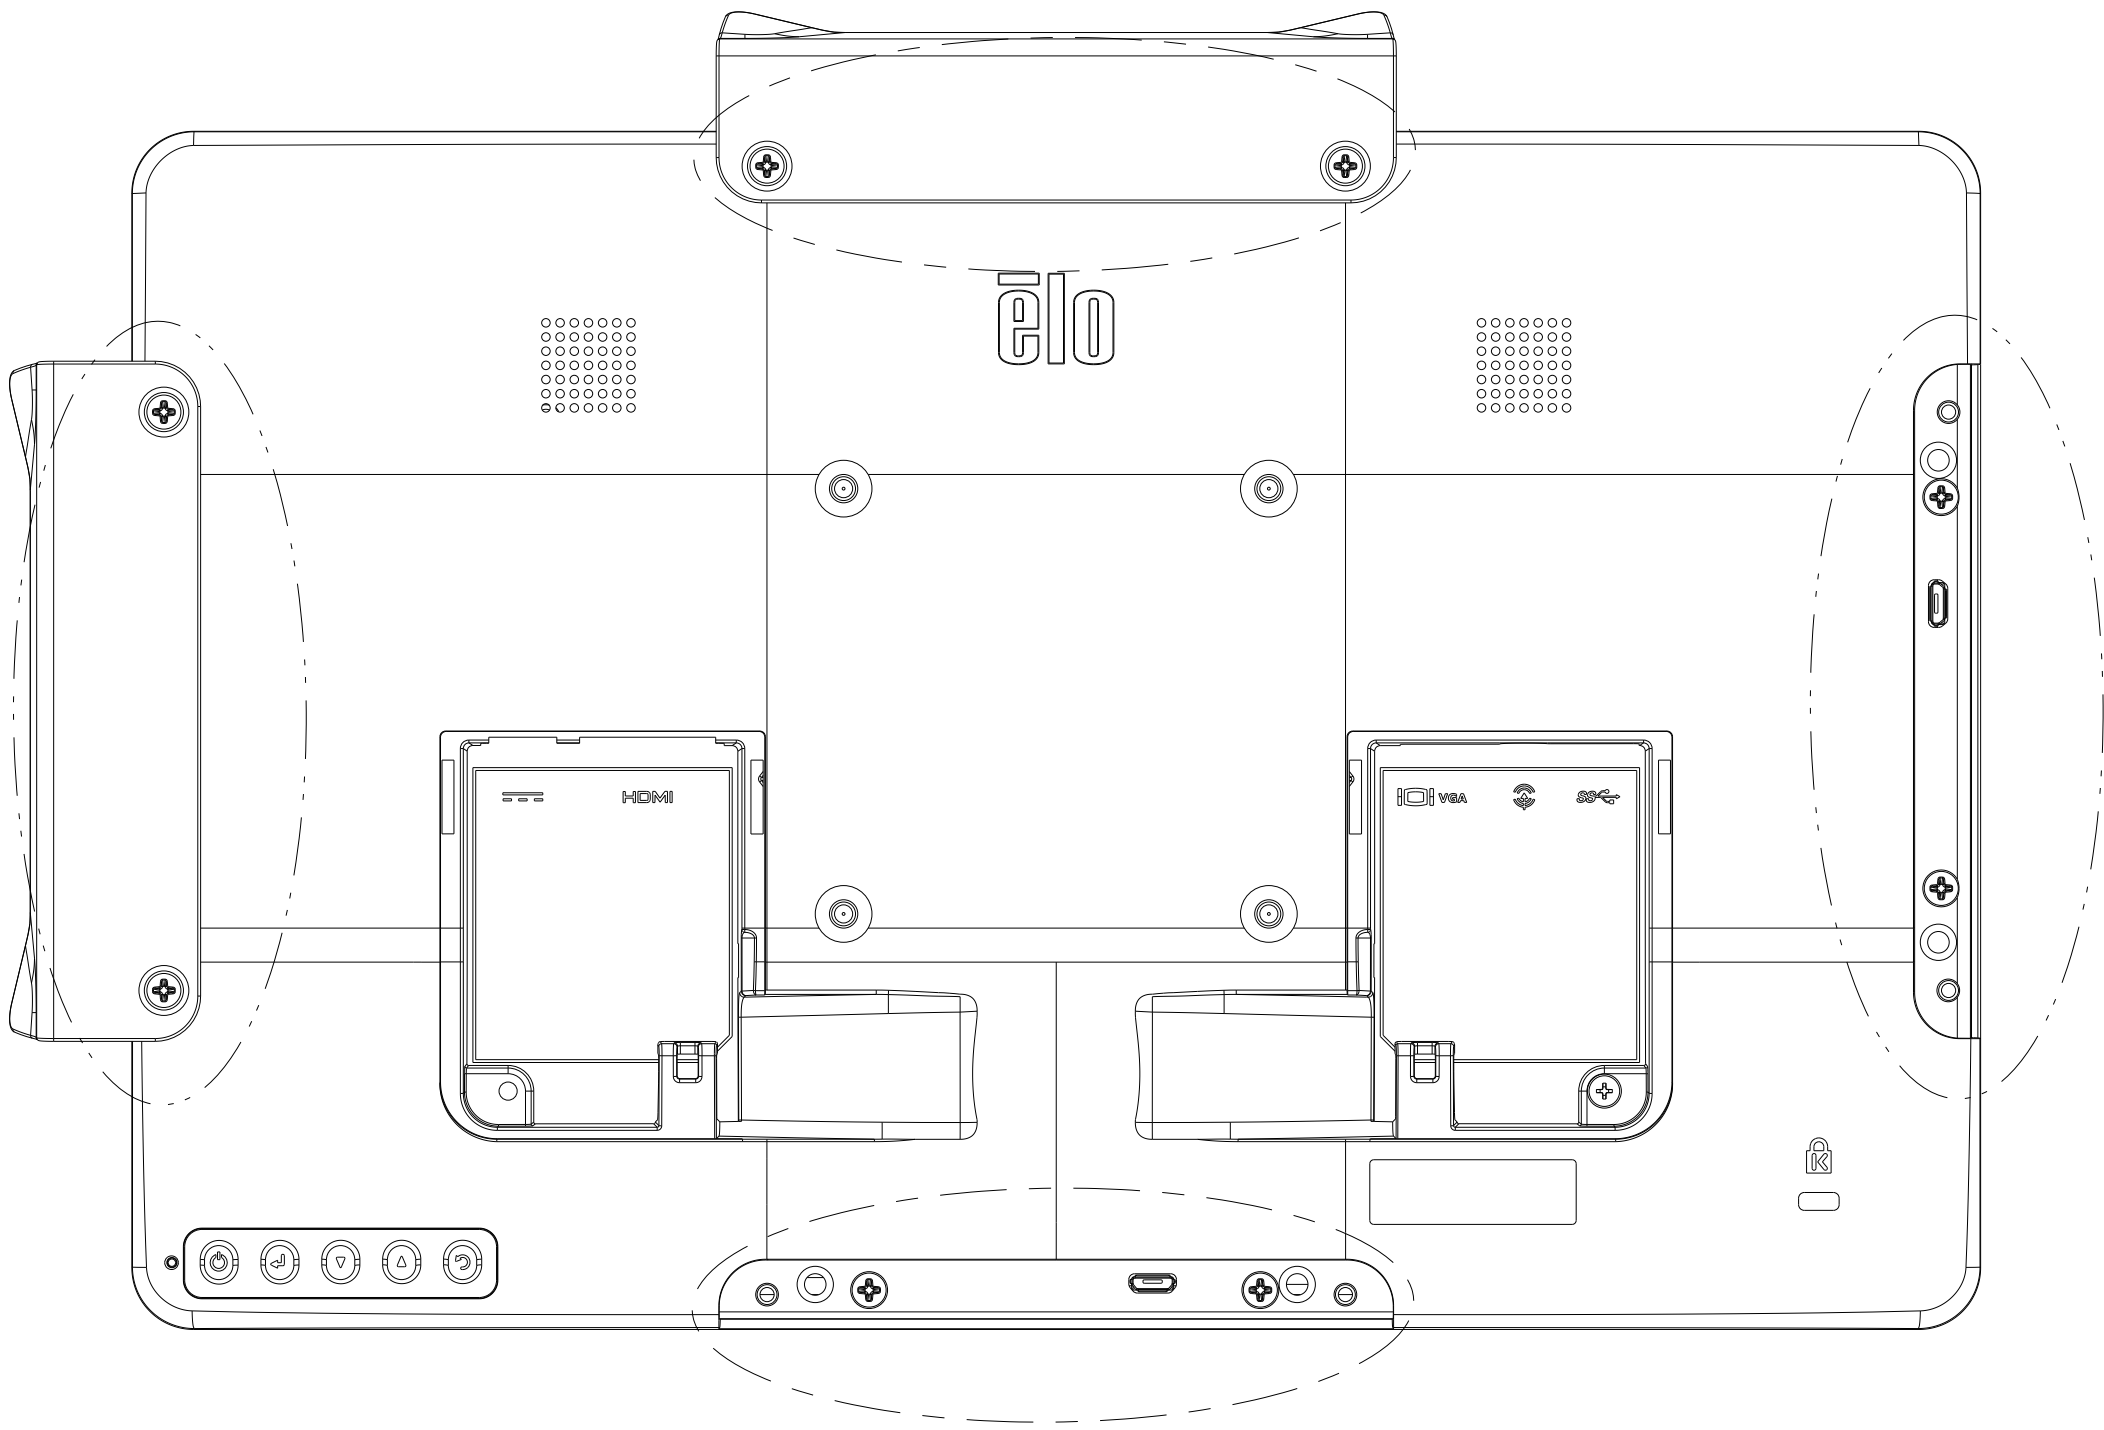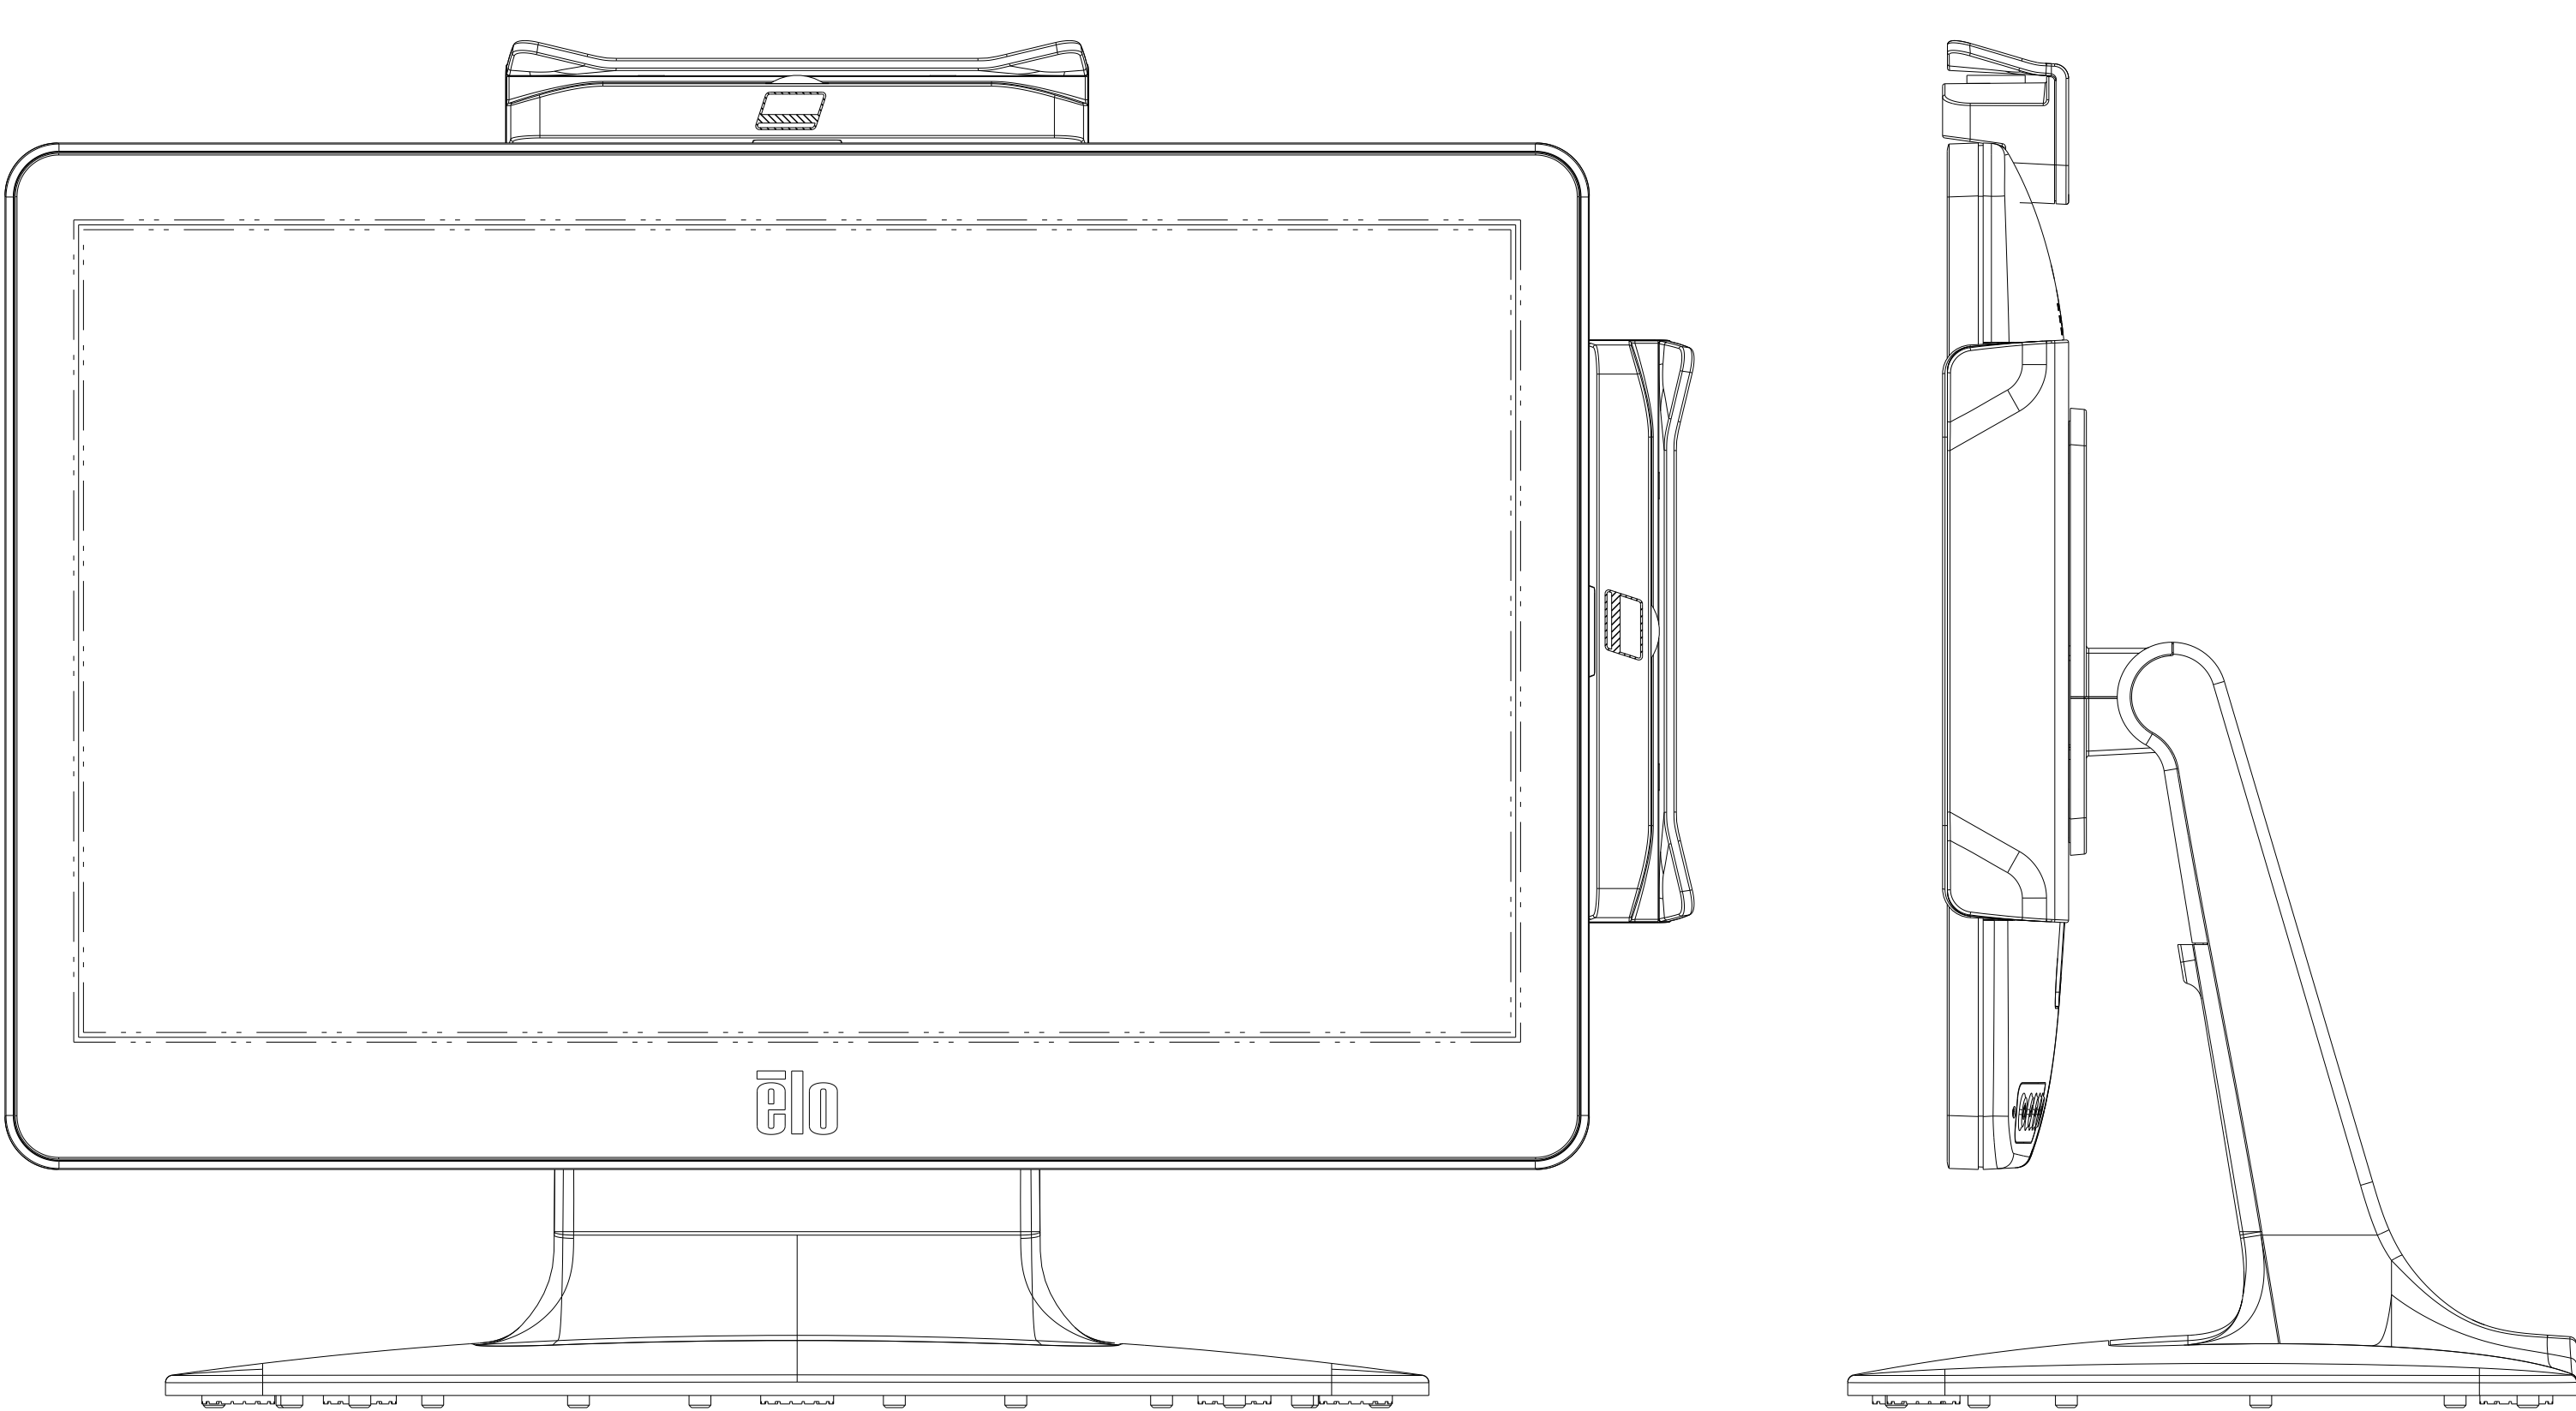

HERE IS PERIPHERALS INSTALLATION PLACE
(MORE DETAIL REFERENCE ACCESSORIES MANUAL)

STAND MOUNTING OPTION

