
## Kit Contents

### Optional 1 (Install on the Side of the Monitor)

1x ADA Controller
1x 150mm Micro-USB Cable
1x 1.2m USB-A to Micro-USB Cable
1x Edge Mounting Bracket

2x M3x12mm Pan-Head Screws
4x M3x18mm Flat-Head Screws
1x H3x100mm L-Type Hex Key



### Optional 2 (Install on the Wallaby Pro)

1x ADA Controller
1x 150mm Micro-USB Cable
1x 1.2m USB-A to Micro-USB Cable
1x Through-Hole Bracket

8x M3x5mm I-Head Screws



Learn more about Elo at **Elo Touch.com**


**America**
Tel +1 408 597 8000
EloSales.NA@elotouch.com

**Europe(EMEA)**
Tel +32 16 930 136
EMEA.Sales@elotouch.com

**Asia-Pacific**
Tel +86 (21) 3329 1385
EloAsia@elotouch.com



The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo and the Elo logo are trademarks of Elo Touch Solutions, Inc., registered in many jurisdictions worldwide.

© 2026 Elo Touch Solution, Inc. All rights reserved.


E483948

# Quick Installation Guide

# Elo Adaptive Controller



Revision A
P/N E483948


www.elotouch.com


Go to www.elotouch.com/support to download user manual.

## Install on the Side of the Monitor


Step 1: Connect the 150mm Micro-USB cable to the ADA . Mount the ADA onto the Edge Mounting Bracket and secure it with the (4) M3x18mm flat-head screws as shown.

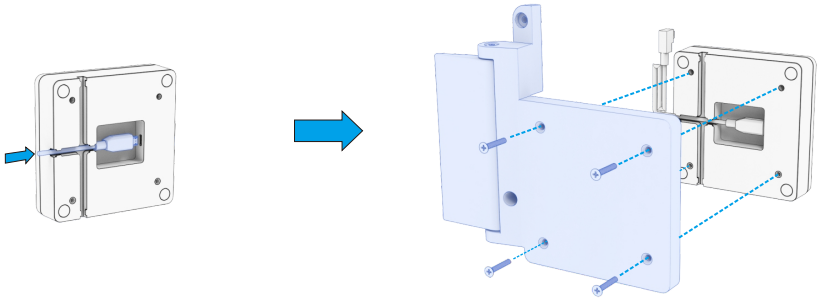

Step 2: Remove the selected peripheral cover from the monitor and connect the cable to the monitor. Then mount the ADA together with the bracket onto the side of the monitor and secure it with the (2) M3x12mm pan-head screws as shown.

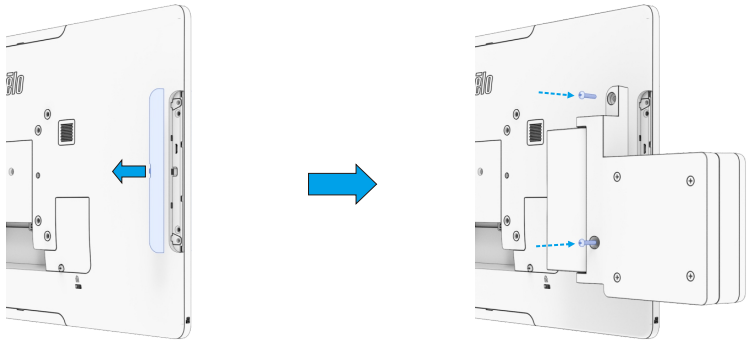


Step 3: Rotate the bracket until it contacts the back cover of the monitor. Tighten the screw at this location using the hex key.

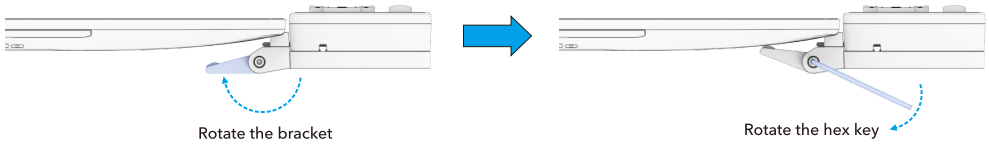



## Install on the Wallaby Pro

Step 1: Connect the 1.2m USB-A to Micro-USB cable to the ADA. Mount the ADA onto the Through-Hole Bracket and secure it with the (4) M3x5mm I-head screws as shown.

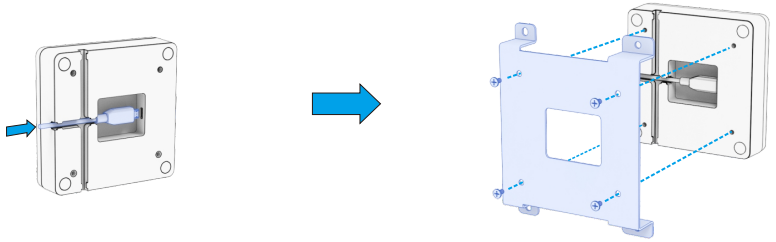

Step 2: Remove the printer door from Wallaby Pro. Mount the ADA together with the Through-Hole Bracket onto the printer door and secure it with the (4) M3x5mm I-head screws as shown.

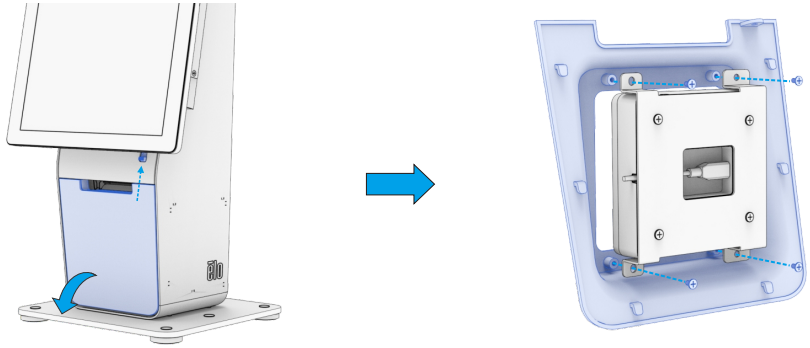

Step 3: Reinstall the assembly onto the Wallaby Pro. Route the USB cable under the lower bracket to the USB hub or directly to the Compute and/or I-Series. Secure with cable ties where indicated by the purple arrows. Push the printer door closed.

