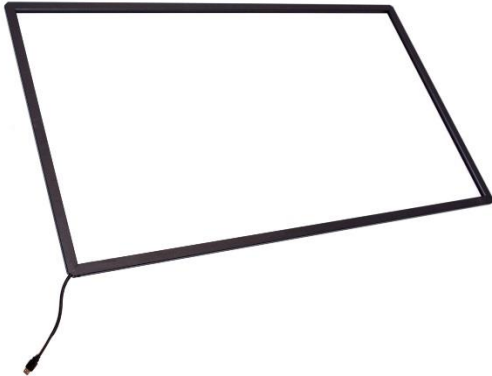# PPMT RS
Touch Screen Overlay

- Plug and play on Windows O/S.
- Support for Mac O/S and Linux.
- Works with most displays including **LG, Samsung, Sharp,** and **Vizio**
- Simple to attach to displays
- Can be bundled with monitor

The RS touch screen overlay is designed for speed, allowing swift and smooth movements on any application. The infrared (IR) sensors easily detect fingers, styluses, gloved hands, or other objects. The RS's thin bezel and durability make it a good fit for commercial applications.

SPECIFICATION	DETAIL
Active area	21.5" to 75". Custom sizes up to 500"
Aspect Ratio	**16:9**
Housing	Aluminum Alloy
Housing color	Black
Bezel size	0.90"
Glass	Tempered glass. No glass is available on request.
Response Time	5ms
Touch Points	2, 4, 6, 10, 16 Points
Touch Accuracy	±1mm
Touch input method	Finger, Finger of gloved hand, Opaque objects
Object size	≥5mm
Input	USB
Drivers	No drivers necessary. Plug and Play on Windows and Linux. Mac driver available.
Operating System	Windows 10, 11, Mac OSX. Linux
Power	USB
Supply Voltage	DC+5V±5%
Operating Current	<300mA
Other	AGM models include custom mounting bar