

# SK-190P-A1

## 19" PCAP 3-in-1 Touch Monitor




### Description

The SK-190P-A1 is a 19" standard format convertible monitor perfect for any industrial grade application, embedded or exposed, that requires quality and reliability in high use environments. Versatile by design, this 19" monitor fits a variety of applications with the ability to withstand harsh conditions while retaining high performance levels. The IP65 rating coupled with an updated I/O selection for seamless integration and OSD controls built into the back housing create a user experience that is effortless and simplistic.

### Featured Specifications

- Size: 19" TFT LCD
- Maximum Resolution: 1280 x 1024
- Contrast Ratio: 1000:1
- Aspect Ratio: 5:4
- Brightness: 250 nits (No Touch), 225 nits (P-CAP)
- View Angle: H: 170°, V: 160°
- Video Port: 1 x VGA (DB15), 1 x HDMI, 1x DP
- Warranty: 3 year

Stand sold separately  
Part #IS-000-A1

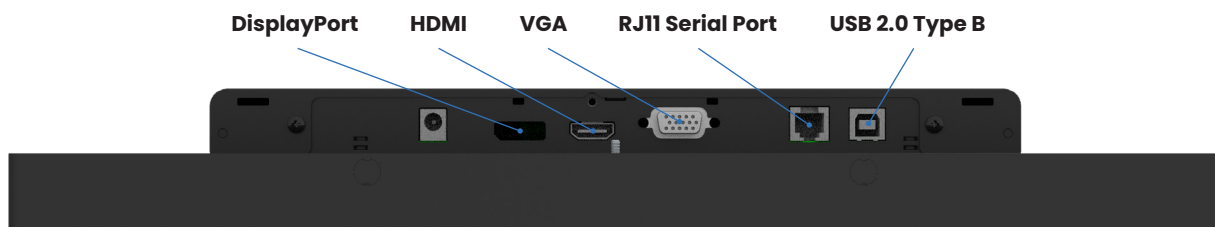

# Specifications

## Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)

## I/O Ports

Serial Port	1 x RJ11 Remote OSD
USB Port	1 x USB 2.0 (Type B) for Touch Interface
Video Port	1 x VGA (DB15), 1 x HDMI, 1x DP
Audio Port	–
Power Input	1 x 2.1 mm 12V DC Jack

## Physical Properties

Power Supply	Max. 60W (12V, 5A) External Power Adaptor
Speaker	–
Housing Color	Black
Construction	Glass, SECC Metal, Plastic (ABS)
Compliance	Front Panel IP65 Compliant, Rear IPX1
Dimensions (W x H x D) mm	416 x 344 x 46.6 mm
Net Weight (kg)	4.4 kg
Gross Weight (kg)	6.3 kg
Carton (W x H x D) mm	500 x 425 x 133 mm
VESA	100 x 100 mm
Ball Drop	–

## Safety

Certifications	CE/FCC/UL(62368)/CB (62368)/CCC
----------------	---------------------------------

## Environment

Operating Temperature	0° C ~ 40° C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20° C ~ 60° C, 10% ~ 90% RH. Non-Condensing

## Optional Peripheral

Industrial Stand	IS-000-A1 (Sold Separately)
Remote OSD	Rem45-A1 (Sold Separately)

