

21.5" Outdoor P-Cap Touch and Non-Touch Display

MOD-21580CH, MOD-21580H

Touch Non-touch



A diverse and durable 1500 NIT outdoor display with a beautifully vibrant picture.

21.5" Outdoor Display Screen


Mimo Monitors is proud to introduce the first in a line of small format touch displays designed for optimum outdoor performance. Durable, reliable, and beautifully vibrant, this small-format outdoor display works at an extended temperature range, from -20c to 50c degrees, making it ideal year round, no matter the temperature. To protect from the elements ranging from water, moisture, sand, dust and insects, this commercial display is IP65 rated, allowing for hard use in nearly every weather condition. With 1500 nits of light, this display offers stunning, clear, crisp, and easy-to-see visuals both in sun and ambient lighting. For added impact the light sensor adjusts the display's brightness during cloudy days and at nighttime to optimize power consumption and ensure an ideal viewing experience. The Mimo Outdoor High Bright Displays are the perfect digital signage for amusement parks, sports arenas, quick service restaurant orders, outdoor kiosks, gas stations, and many more commercial applications.

Features:

- IP 65 rating
- Optic bonded to reduce glare
- High bright, vivid screen
- PCAP touch optional MOD-21580CH
- Wide operating temperature for very hot and very cold conditions
- Anti-glare cover glass
- VESA 100 mounting holes
- Optically bonded

Applications:


- Outdoor interactive digital signage
- Outdoor interactive wayfinding
- Outdoor menu boards with ordering capability
- Outdoor stadiums
- Outdoor amusement parks
- Outdoor restaurants
- Outdoor transportation
- Outdoor service and gas stations
- Food trucks



Product Specifications

| DISPLAY | Display | 21.5" horizontal |
|---------|-----------------------|--------------------------|
| | Resolution | 1920 x 1080 |
| | Brightness | 1500 NITS |
| | Contrast | 1000:1 |
| | Aspect Ratio | 16:9 |
| | Optic Bonded | Yes |
| | Viewing Angle | 85/85/85 |
| | I/O | Ethernet, HMDI, VGA, USB |
| | Touch | 10-point P-Cap |
| | Power | 100-240VAC |
| | Power Consumption | 60 watts |
| | IP Rating | IP65 |
| | Operating Temperature | -20F - 122F |
| | Product Dimensions | 543x336x55mm |
| | Product Weight | 10-12kg |

Product Pictures

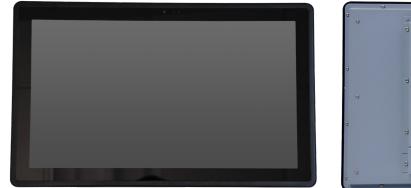



Mechanical Design

- 1. USB
- 2. Audio
- 3. RGB
- 4. Power
- 5. HDMI
- 6. R545 Ethernet7. OSD
- 8. VESA 100 Mount Holes



Mimo Monitors 743 Alexander Rd. Suite 15 Princeton, NJ 08540

info@mimomonitors.com Sales: **1-855-YES-MIMO (937-6466)**

2020-0126 Rev 2 - 79931