

22" (21.5" viewable) Full HD 1080p Optical Touch Monitor

Intuitive Multi-Touch Design

ViewSonic®
See the difference® 

TD2220



The 22" (21.5" viewable) ViewSonic® TD2220 is a multi-touch Full HD LED backlit monitor with 1920x1080 resolution, integrated speakers, DVI & VGA inputs and VESA mountable design. It has 20,000,000:1 MEGA Dynamic Contrast Ratio for sharp crisp images, SRS Premium Sound® for crystal clear sound and Eco-mode for up to 40%* energy savings come standard in the new 22" (21.5" viewable) offering. Perfect for both commercial and consumer applications, the TD2220 supports the USB HID Touch driver and is fully compatible with Windows® 7 and Windows® 8. The TD2220 is a one-stop solution for your multi-touch monitor needs. You will also get the most out of your investment with ViewSonic's strongest pixel performance guarantee, 3-year limited warranty, as well as ENERGY STAR® and EPEAT Silver certifications.

Multi-touch Screen with 8H Surface Hardness

Simply touch, drag, resize and manipulate, photos, documents or web pages, just like on your favorite mobile devices! 8H scratch resistant surface hardness ensures a consistent high quality touch experience and durability.



Full HD 1080p Display with 1920x1080 Resolution

The 22" (21.5" viewable) Full HD monitor supports imaging intensive commercial applications, video and image editing and entertainment. 20,000,000:1 MEGA Dynamic Contrast Ratio provides a crisp image with high level details.

22" (21.5" viewable) Full HD 1080p Optical Touch Monitor

TD2220



Integrated speakers with SRS Premium Sound®

The TD2220 monitor has two integrated speakers for enhanced multimedia performance with crystal clear stereo sound.




ENERGY STAR® and EPEAT Silver certified

The TD2220 is environmentally sound with Energy-saving LED backlight and Eco-mode. You can save up to 40%* in your energy cost comparing to a regular 22" monitor.

OptiSync digital/analog inputs expand your connectivity

The TD2220 supports Windows® 7 and Windows® 8 touch function and boasts USB HID (Human Interface Device) for plug-and-play. The TD2220 can be connected through USB for instant two-point touch operation and for experiencing easy navigation through intuitive touch operation. Two USB ports for additional connectivity for peripherals and electronic devices. Multi-mode input technology supports both digital (DVI) and analog (VGA) signals for compatibility and configuration flexibility.

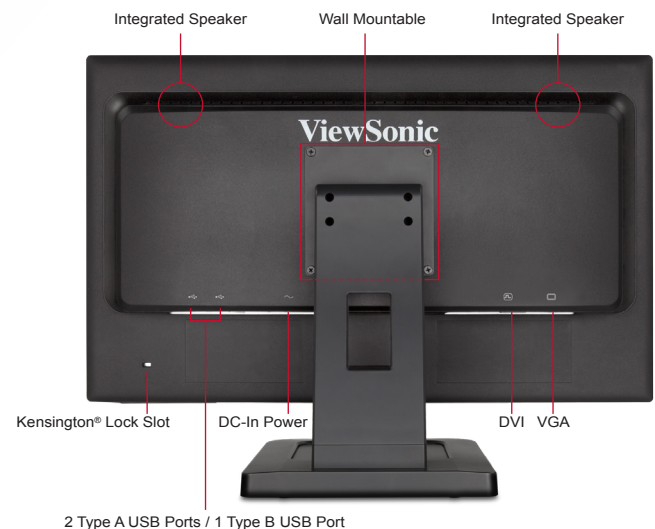


Specifications

LCD PANEL	Type	22" (21.5" viewable) Wide Color TFT Active Matrix LED
	Display Area	18.8" horizontal x 10.6" vertical; 21.5" diagonal
	Optimum Resolution	1920x1080
	Brightness	200 cd/m² (typ.)
	Contrast Ratio	1000:1 (typ.)
	Dynamic Contrast Ratio	20,000,000:1
	Viewing Angles	170° horizontal, 160° vertical
	Response Time	5ms (typ.)
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (8H)
VIDEO INPUT	Analog	RGB analog (0.7 / 1.0 Vp-p, 75 ohms)
	Digital	DVI (TMDS, 100 ohms)
	Frequency	Fh: 24~83kHz, Fv: 50~76Hz
	Sync	Separate Sync
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC	PC compatibles (Windows® 7 / Windows® 8 OS)
	Mac®	n/a
CONNECTOR	Video Analog	15-pin mini D-sub (VGA)
	Video Digital	DVI-D (with HDCP)
	Power	Internal power board, 3-pin plug (CEE22)
POWER	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	26W (typ.) / 43W (max.)
	Optimize	21W (typ.)
	Conserve	18W (typ.)
CONTROLS	Front Panel Buttons	1, 2, Down, Up, Power
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select (D-SUB, DVI-D), Audio Adjust (Volume, Mute), Color Adjust (sRGB, Bluish, Cool, Native, Warm, User Color [R,G,B]), Information, Manual Image Adjust (H/V Position, Horizontal Size, Fine Tune, Sharpness, Dynamic Contrast, Response Time, Aspect Ratio, Eco-mode), Setup Menu (Language Select, Resolution Notice, OSD Position, OSD Timeout, OSD Background, Auto Power Off, Power Indicator), Memory Recall

ERGONOMICS	Tilt	20°~5°
OPERATING CONDITIONS	Temperature	32~104° F (0~40° C)
	Humidity	20~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	20.11 x 14.37 x 9.45 in. / 511 x 635 x 240 mm
	Physical without Stand	20.11 x 12.22 x 2.61 in. / 511 x 310 x 66 mm
	Packaging	22.44 x 16.81 x 8.43 in. / 570 x 427 x 214 mm
WEIGHT	Net with Stand	10.85 lb. / 4.92 kg
	Net without Stand	8.73 lb. / 3.96 kg
	Gross	14.22 lb. / 6.45 kg
WALL MOUNT	VESA®	100mm x 100mm
REGULATIONS		CE, CB, BSMI, PSB, SASO, C-tick, e-standby, KC, UL/cUL, FCC-B (including ICES003), UL CoC, Mexico Energy, GOST-R/Hygienic, UkrSEPRO, TCO 5.2, Erp, CCC, China Energy, ENERGY STAR®, EPEAT Silver, WEEE, RoHS, SVHC list
RECYCLE / DISPOSAL		Please dispose of in accordance with local, state or federal laws.
POWER MANAGEMENT		ENERGY STAR® standards
WARRANTY		Three-year limited warranty on parts, labor and backlight.

What's in the box?

TD2220 display, power cable, audio cable, AC/DC adapter, VGA cable, DVI cable, Quick Start Guide, ViewSonic Wizard CD (available in some countries only)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*Energy savings may vary based on actual usage and other factors. Program, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Premium Sound and the SRS Logo are trademarks or registered trademarks of SRS Labs. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2012 ViewSonic Corporation. All rights reserved. [16332-01B-10/12] TD2220-1

Sales: (888) 881-8781 or SalesInfo@ViewSonic.com • More product information: www.ViewSonic.com