

KIPC2549B(-S)
KIPC2550B(-S)
KIPC2555B(-S)


Portrait Back-to-Back Kiosk

Fits most 49", 50" or 55" displays less than 1.81" (46mm) deep




- Accommodates ultra-thin or deeper commercial displays up to 1.81" (46mm) thick, while accentuating the slim, curvature kiosk design
- Designed with architectural aluminum and a 3/8" steel base plate that provides stability, strength and corrosion resistance
- Two thermostat controlled fans quietly exhaust heat from inside the kiosk, ensuring proper airflow
- Six outlet, UL- and cUL-approved surge suppressor with 6' cord to protect voltage-sensitive components from damaging power surges
- Internal micro-adjustments allow for quick positioning of display within the kiosk window for flush alignment
- Secured doors allow convenient access to the display, media player and other internal components for easy installation and maintenance
- Stand-alone or fully integrated with display, audio components, media player and input components
- Supports a wide range of aesthetic options including multiple colors, vinyl wraps, etc. to best match the environment or promote brand strategy
- Pre-assembled to simplify installation of entire solution
- High-performance, premium powder coat finish protects the unit and extends the product lifespan
- Wheel Base KIPC25B(-S)-WHL models are available with 2" casters and leveling feet, which allows you to easily move the kiosk around and lock it into place

Note: Kiosk enclosure does not include cover glass

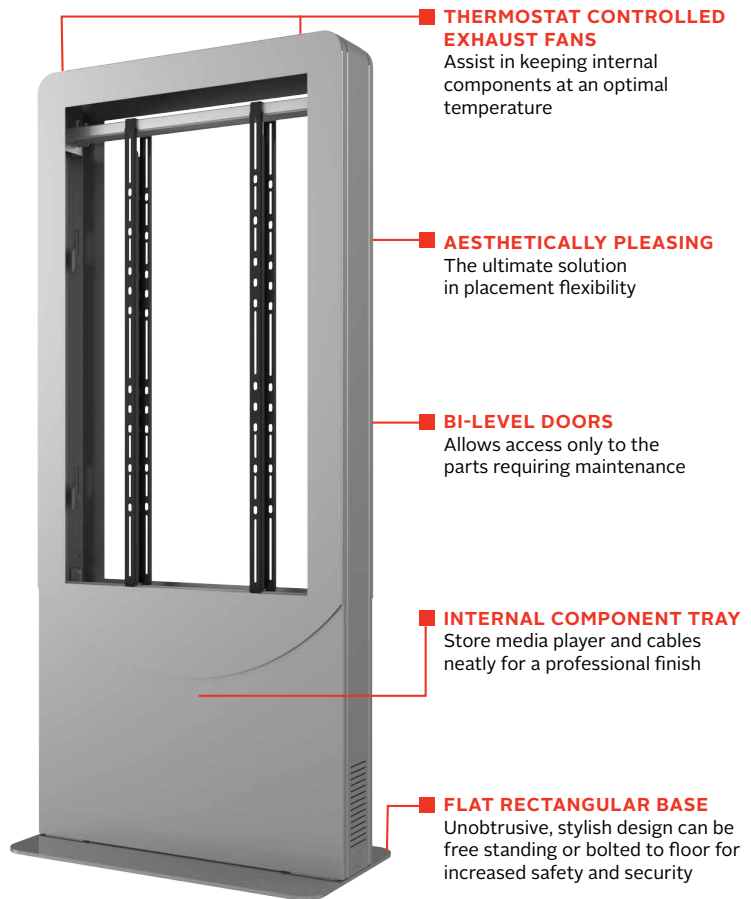

Display Height Adjustability



Depth Adjustability



Keyed-Alike Cam Locks



Component Tray & Shelf



Wheel Base KIPC25B(-S)-WHL Models Available

RoHS



TAA COMPLIANT

Please visit peerless-av.com/en-us/patents for patent information.

info@peerless-av.com

peerless-av.com

peerless-AV[®]
Driving Technology Through Innovation

Model Numbers

WARRANTY: 5 years on metal components, 1 year on electronic components

KIPC2549B(-S)	Portrait Back-to-Back Kiosk fits 49" displays less than 1.81" (46mm) deep
KIPC2550B(-S)	Portrait Back-to-Back Kiosk fits 50" displays less than 1.81" (46mm) deep
KIPC2555B(-S)	Portrait Back-to-Back Kiosk fits 55" displays less than 1.81" (46mm) deep

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
KIPC2549B(-S) KIPC2550B(-S) KIPC2555B(-S)	34.00" x 78.20" x 20.50" (864 x 1986 x 521mm)	KIPC2549B(-S): 190lb (86kg) KIPC2550B(-S): 189lb (86kg) KIPC2555B(-S): 181lb (82kg)	125lb (56kg) Per Display	Powder Coat	KIPC2549B, KIPC2550B, KIPC2555B: Gloss Black KIPC2549B-S, KIPC2550B-S, KIPC2555B-S: Silver

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
KIPC2549B(-S) KIPC2550B(-S) KIPC2555B(-S)	38.00" x 86.00" x 27.00" (965 x 2185 x 685mm)	KIPC2549B(-S): 230lb (104kg) KIPC2550B(-S): 229lb (104kg) KIPC2555B(-S): 221lb (100kg)	KIPC2549B: 735029317753 KIPC2550B: 735029317791 KIPC2555B: 735029317814 KIPC2549B-S: 735029317777 KIPC2550B-S: 735029317807 KIPC2555B-S: 735029317821	Kiosk Enclosure, Display Mount, Installation Instructions and Mounting Hardware	1


Additional Models KIPC25B(-S)-WHL Models: Portrait Back-to-Back Kiosks with Wheel Base

Available Custom Kiosk Accessories

Hdmi and Component Video Cables
Stereo Speaker System with Amplifier
Logitech Webcameras

Clear or Non-glare Tempered Glass
Clear or Non-glare Polycarbonate
Logos and Graphics

Contact Peerless-AV Customer Care for more information at info@peerless-av.com or 800.865.2112

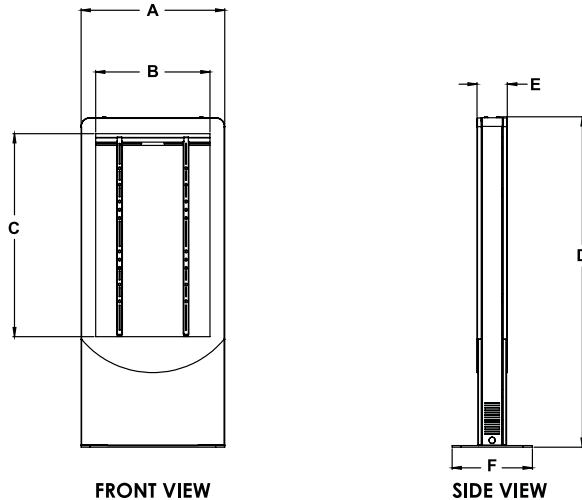

All dimensions = inch (mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"	DIMENSION "F"
KIPC2549B	34.00" (864mm)	24.15" (613mm)	42.78" (1087mm)	78.24" (1987mm)	7.20" (183mm)	19.00" (483mm)
KIPC2550B	34.00" (864mm)	24.63" (626mm)	43.66" (1109mm)	78.24" (1987mm)	7.20" (183mm)	19.00" (483mm)
KIPC2555B	34.00" (864mm)	27.03" (686mm)	48.05" (1220mm)	78.24" (1987mm)	7.20" (183mm)	19.00" (483mm)

Architect Specifications

The Portrait Back-to-Back Kiosk shall be a Peerless-AV model KIPC2549B(-S), KIPC2550B(-S) or KIPC2555B(-S) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV EMEA
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV[®]
Driving Technology Through Innovation

LIT-1612 rev.4