

AOE32DD Series

WWW.GVISION-USA.COM

32" FHD All-Over-Ethernet AOE Monitor




FEATURES

- 32-Inch Screen Size / 1920 x 1080 Full HD Resolution
- Max 80m with CAT6 Cable
- 10-Point PCAP Projected Capacitive Touch
- 1x RJ45 for Video, Audio, Power Inputs and Keypad, Mouse, Touch Signals
- Interface (Monitor): RJ45 Input
- Injector: HDMI Input / RJ45 Output / USB Type-A
- 3W x2 Built-In Speaker
- 3-Year Warranty

DIMENSIONS

UNIT:MM

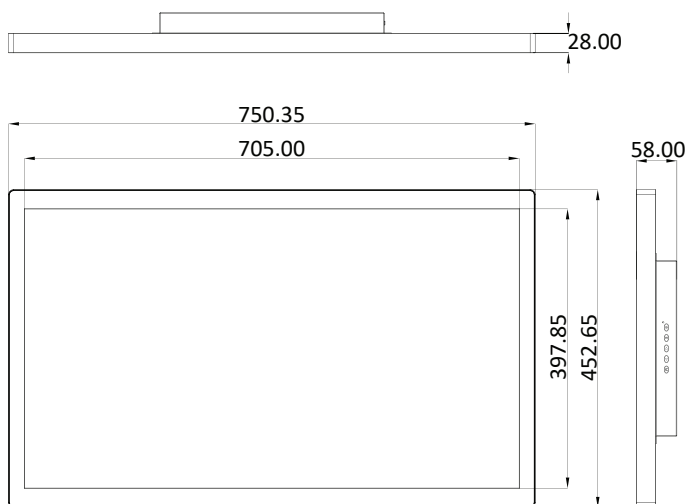

AOE32DD Series

SPECIFICATIONS	
Size	32 In
Resolution	1920 x 1080
Display Area (mm)	698.40(H) x 392.85(V)
Aspect Ratio	16 : 9
Response Time	8ms
Viewing Angle	178° / 178°
Brightness	350cd/m ²
Contrast Ratio	1200 : 1
Color	16.7M
Saturation	68%
Backlight	LED
Interface	RJ45 x1
Touch Type/Point	PCAP/10-Point Touch
Speaker	3W x 2
Material/Color	Metal/Black
Power Consumption	Max.60W (80m CAT.6 cable)
Saving Mode	< 2W
Power Input	802.3bt type4 POE / 90W POE Generator
Operating Temp.	32° F ~ 122° F (0° C ~ 50° C)
Storage Temp.	-4° F ~ 140° F (-20° C ~ 60° C)
Dimensions (In/mm)	29.54 x 17.82 x 2.28 / 750.35 x 452.65 x 58
Net Weight (Lbs/ Kg)	30.86 Lbs (14 Kg)
VESA™	200 x 200
Accessories	AOE Injector Device x 1, HDMI Cable x 1 Power Cord x 1

**Specifications may change without any notice

ORDER INFO

Model Name	TAA	Logo	Stand
AOE32DD-4RP000	X	X	X
AOE32DD-4RP0G0	X	O	X
AOE32DD-4RP0T0	O	O	X
AOE32DD-4RP0S0	O	X	X

INJECTOR INFO

Interface	
RJ45	AOE 90W Output x1
HDMI	Input x1
USB Type-A	Input x2



30398 Esperanza,
Rancho Santa Margarita, CA 92688

888-651-9688 / 949-586-3338

sales@gvision-usa.com
<https://www.gvision-usa.com>

